

Luminaire


Code A009010
Name TIZIO TAVOLO NERO

Measur.

Code FTS0002580
Name TIZIO TAVOLO NERO

Luminaire Flux	563.52 lm	Luminaire Power	50.00 W	Efficacy	11.27 lm/W	Efficiency	47.76%
Lamps Flux	1180.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	87 mm	Width	114 mm	Height	64 mm
Rectangular Luminous Area		Length	82 mm	Width	81 mm	Height	0 mm
Horizontal Luminous Area	0.006642 m2	Emitting area on Plane 180°			0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°			0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.001607 m2		
Coordinate system	CG	Symmetry Type			Sym. on planes 0-180		
Date	01-08-1995	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			1180.00 lm		
64440 ECO							
C.I.E.	49 84 98 100 48	D DIN 5040		A30			
F UTE	0.48 E	B NBN		BZ 4			


87mm x 114mm



Semipiani C

180.0 ——— 0.0
270.0 ••••• 90.0

ULOR 0.01 %
DLOR 47.75 %
RN 0.01 %

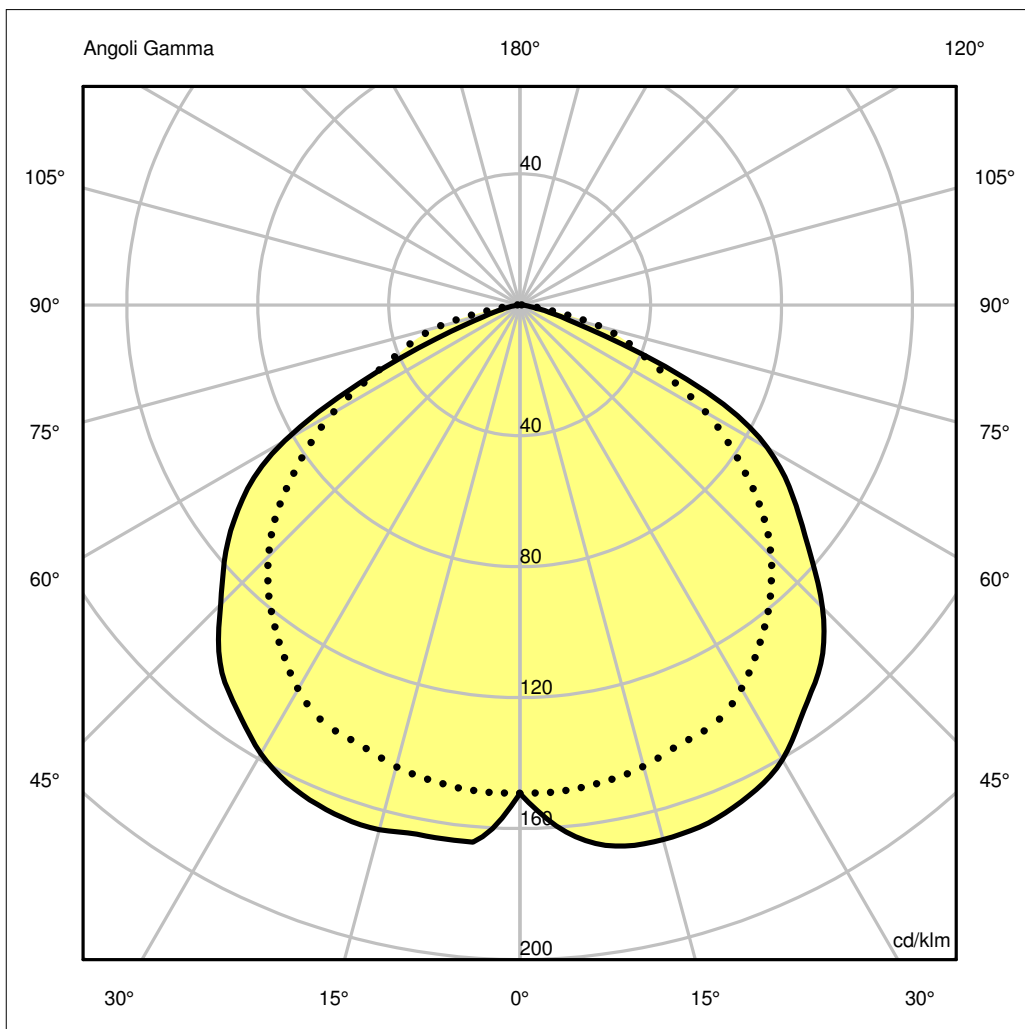

Luminaire

Code A009010
Name TIZIO TAVOLO NERO

Measur.


Code FTS0002580
Name TIZIO TAVOLO NERO

Luminaire Flux	563.52 lm	Luminaire Power	50.00 W	Efficacy	11.27 lm/W	Efficiency	47.76%
Lamps Flux	1180.00 lm	Maximum value	169.07 cd/klm	Position	C=0.00 G=15.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	87 mm	Width	114 mm	Height	64 mm
Rectangular Luminous Area		Length	82 mm	Width	81 mm	Height	0 mm
Horizontal Luminous Area		0.006642 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001607 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		01-08-1995		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1180.00 lm	
64440 ECO							
C.I.E.	49 84 98 100 48			D DIN 5040		A30	
F UTE	0.48 E			B NBN		BZ 4	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.79	3.57	5.36	7.14	8.93	OC	1.37	2.73	4.10	5.47	6.83
OB	1.71	3.42	5.14	6.85	8.56	OD	1.37	2.73	4.10	5.47	6.83

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	176.16	190.68	199.50	195.23	178.44	154.25	120.10	74.28	13.09	1.43
OB	176.16	194.38	195.80	192.39	177.87	152.54	122.09	55.78	7.96	0.57
OC	176.16	176.02	172.30	166.44	150.28	128.11	95.52	56.19	29.75	2.71
OD	176.16	176.02	172.30	166.44	150.28	128.11	95.52	56.19	29.75	2.71

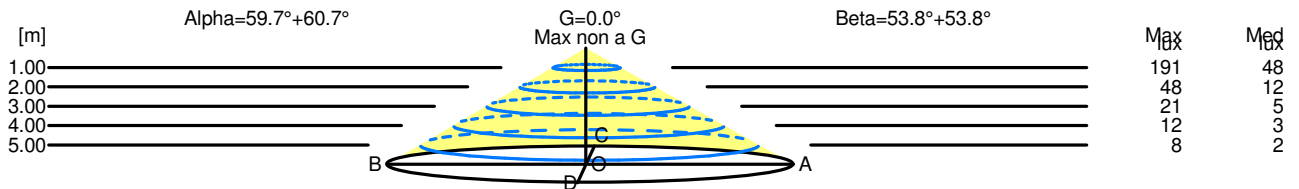

H[m]	D[m]	Max lux	Med lux	Alpha=59.7°+60.7°	G=0.0 Max non a G
1.00	3.50	191	48		
2.00	7.00	48	12		
3.00	10.49	21	5		
4.00	13.99	12	3		
5.00	17.49	8	2		

H[m]	D[m]	Max lux	Med lux	Beta=53.8°+53.8°	G=0.0 Max non a G
1.00	2.73	191	48		
2.00	5.47	48	12		
3.00	8.20	21	5		
4.00	10.93	12	3		
5.00	13.67	8	2		