


## Luminaire

Code 1414220A  
Name GOPLE MINI C BCO+BIANCO SFUMATO

## Measurem.

Code FTS2000727  
Name GOPLE MINI C BCO+BIANCO SFUMATO

Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=340.00 G=19.00	CG	Asymmetrical
Round Luminaire Round Luminous Area	Diam. 150 mm Diam. 150 mm	Height	296 mm	Height	296 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.017671 m2 0.044400 m2 0.044400 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.044400 m2 0.044400 m2 0.047356 m2	
Coordinate system	CG	Symmetry Type				Asymmetrical	
Date	22-01-2019	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	30 56 79 65 94	D DIN 5040		B11			
F UTE	0.60 J + 0.33 T	B NBN		BZ 7			

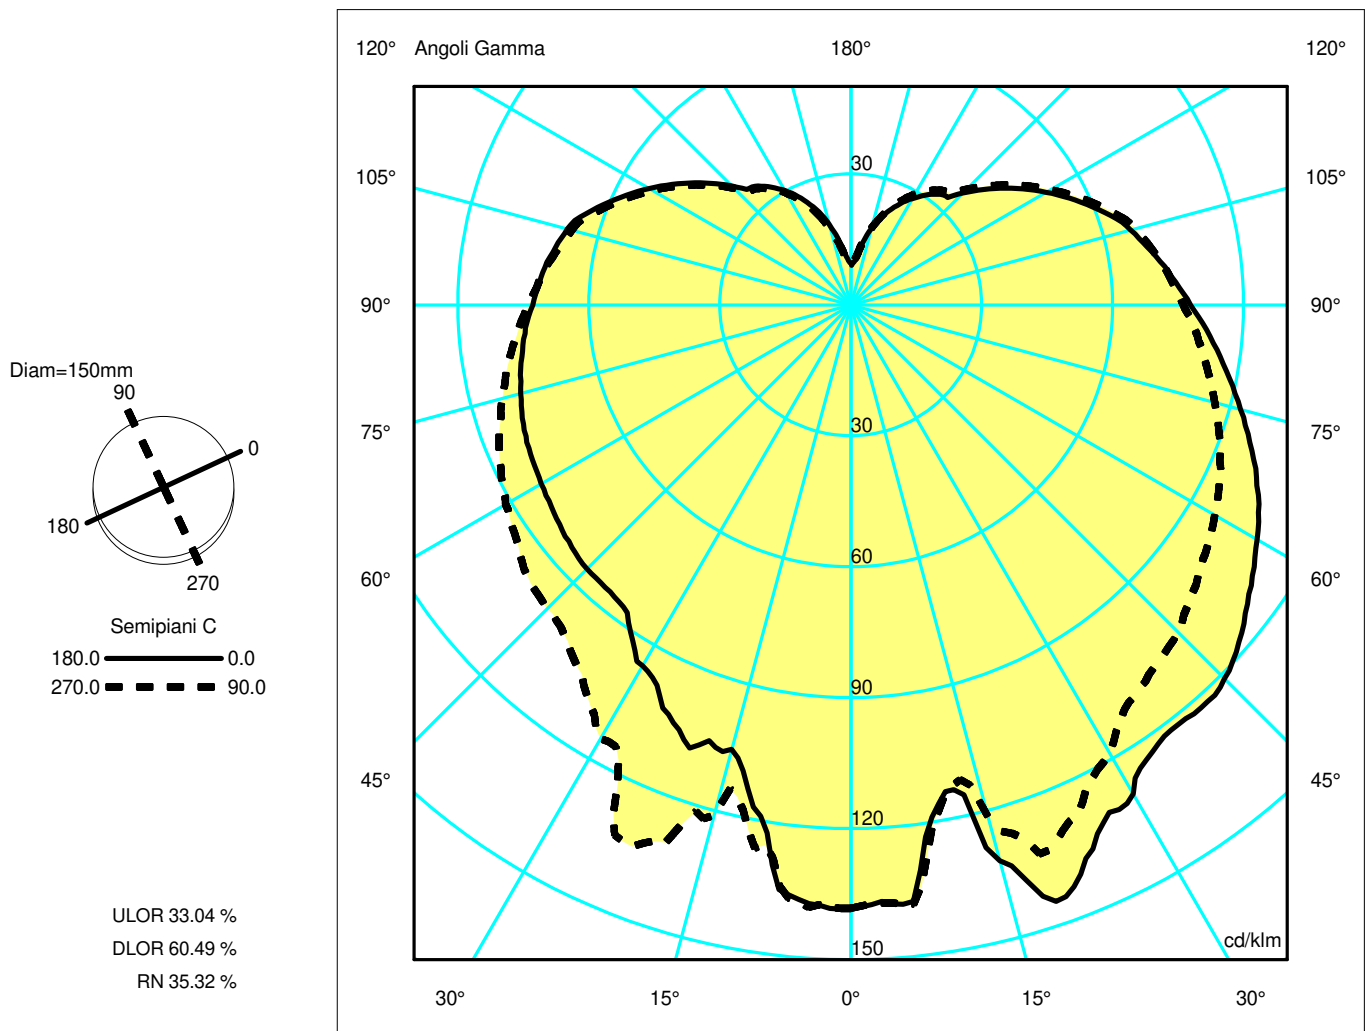

<b>Luminaire</b>							
Code	1414220A						
Name	GOPLÉ MINI C BCO+BIANCO SFUMATO						
<b>Measur.</b>							
Code	FTS2000727						
Name	GOPLÉ MINI C BCO+BIANCO SFUMATO						
Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=340.00 G=19.00	CG	Asymmetrical
Round Luminaire		Diam.	150 mm	Height	296 mm		
Round Luminous Area		Diam.	150 mm	Height	296 mm		
Horizontal Luminous Area		0.017671 m2		Emitting area on Plane 180°		0.044400 m2	
Emitting area on Plane 0°		0.044400 m2		Emitting area on Plane 270°		0.044400 m2	
Emitting area on Plane 90°		0.044400 m2		Glare area at 76°		0.047356 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		22-01-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	30 56 79 65 94			D DIN 5040	B11		
F UTE	0.60 J + 0.33 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =19

Apertura a destra non trovata, gamma =19

Apertura a destra non trovata, gamma =19