



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

● Black soft touch
cod. 60L01ST00

○ Matt white
cod. 60L02OP00

● Brushed nickel
cod. 60L4400

Special

● Metallic bronze
cod. 60L29MT00

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- UGR: < 19
- CCT: 3000K
- CRI index: >97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 14,4 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

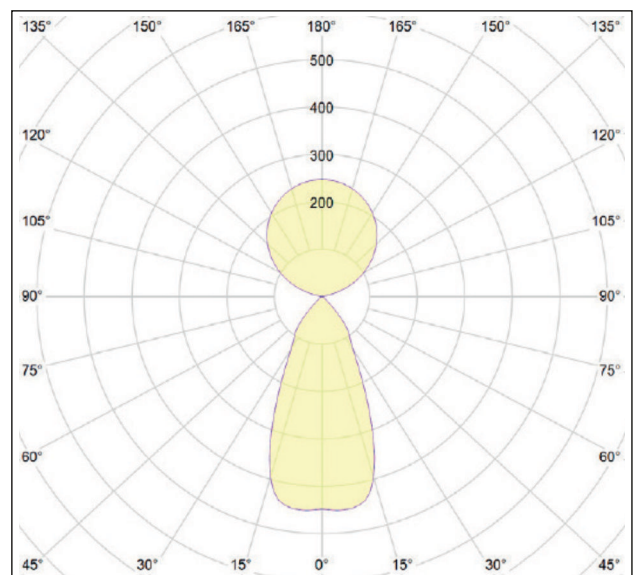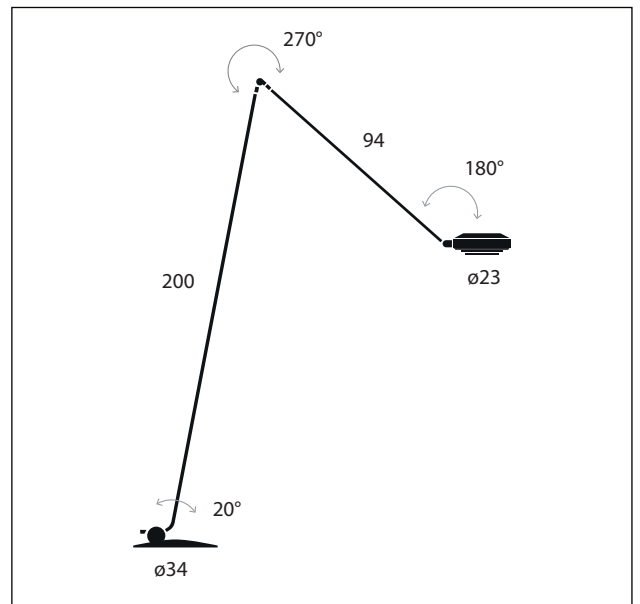

Packaging
cardboard box
211×33×13 + 40×40×10
cm 0,127 m³ + 0,018 m³

Gross weight
5,6 Kg + 13 Kg