

Luminaire

Code 1696010A
Name IN-EI TATSUNO/OTOSHIGO S

Measurem.

Code FTS1801426
Name IN-EI TATSUNO/OTOSHIGO S


Luminaire Flux	2118.59 lm	Luminaire Power	28.00 W	Efficacy	75.66 lm/W	Efficiency	100.00%
Lamps Flux	2118.59 lm	Maximum value	109.61 cd/klm	Position	C=45.00 G=86.00	CG	Asymmetrical
Rectangular Luminaire		Length	370 mm	Width	370 mm	Height	1510 mm
Rectangular Luminous Area		Length	370 mm	Width	370 mm	Height	230 mm
Horizontal Luminous Area		0.136900 m2		Emitting area on Plane 180°		0.085100 m2	
Emitting area on Plane 0°		0.085100 m2		Emitting area on Plane 270°		0.085100 m2	
Emitting area on Plane 90°		0.085100 m2		Glare area at 76°		0.115691 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		21-09-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2118.59 lm	

LED Flux=2923lm LED Power=24W Eff=72% EfcLed=122lm/W EfcLum=76lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h


C.I.E. 17 42 70 54 100
F UTE 0.54 J + 0.46 T

D DIN 5040
B NBN

C11
BZ 10 / 0.8 / BZ 9 / 1 / BZ 10 / 2.5 / BZ 9 / 3 / BZ 10



ULOR 45.98 %
DLOR 54.02 %
RN 45.98 %

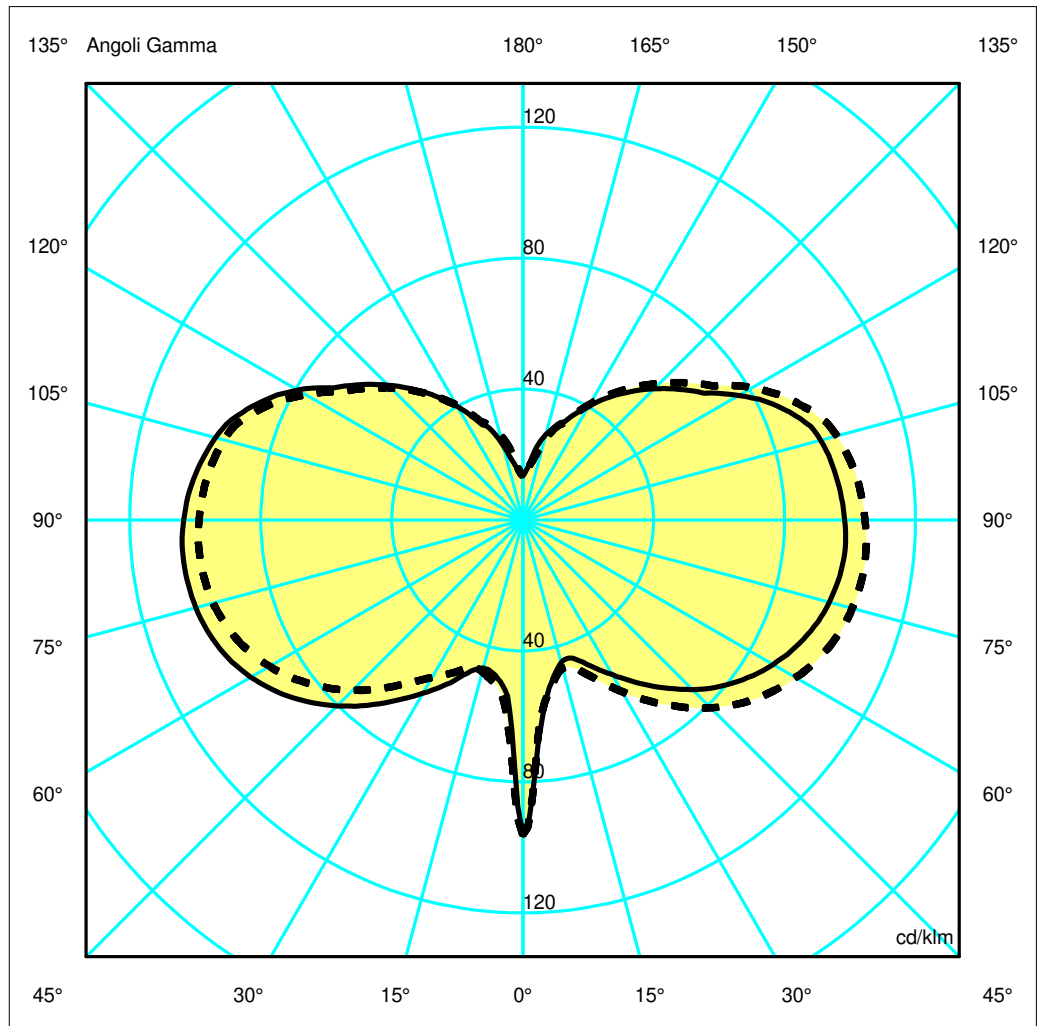

Luminaire

Code 1696010A
Name IN-EI TATSUNO/OTOSHIGO S

Measur.

Code FTS1801426
Name IN-EI TATSUNO/OTOSHIGO S

Luminaire Flux	2118.59 lm	Luminaire Power	28.00 W	Efficacy	75.66 lm/W	Efficiency	100.00%
Lamps Flux	2118.59 lm	Maximum value	109.61 cd/klm	Position	C=45.00 G=86.00	CG	Asymmetrical
Rectangular Luminaire		Length	370 mm	Width	370 mm	Height	1510 mm
Rectangular Luminous Area		Length	370 mm	Width	370 mm	Height	230 mm
Horizontal Luminous Area		0.136900 m2		Emitting area on Plane 180°		0.085100 m2	
Emitting area on Plane 0°		0.085100 m2		Emitting area on Plane 270°		0.085100 m2	
Emitting area on Plane 90°		0.085100 m2		Glare area at 76°		0.115691 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		21-09-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2118.59 lm	
LED Flux=2923lm LED Power=24W Eff=72% EfcLed=122lm/W EfcLum=76lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	17 42 70 54 100			D DIN 5040	C11		
F UTE	0.54 J + 0.46 T			B NBN	BZ 10 / 0.8 / BZ 9 / 1 / BZ 10 / 2.5 / BZ 9 / 3 / BZ 10		

Apertura a sinistra non trovata, gamma =-84

Apertura a sinistra non trovata, gamma =-84

Apertura a sinistra non trovata, gamma =-84