


MINIROOLER 48VDC 17W 3000K CRI90 50°

Code: 471-019BW-30

Fixed miniaturized linear track light for 48VDC tracks, featuring 15 high-efficiency LEDs of the latest generation and PMMA microlenses. Thanks to its small dimensions, Miniroller can be an invisible presence within the 14mm gap of 48VDC tracks and 35 Track. Miniroller grants high lighting performance, low glare levels and homogeneous light distribution. This track light can be used in combination with other ARIA's 48VDC track light tools, for a highly versatile and performing use of the light, and for a greatest freedom of application in residential, contract, hospitality spaces and offices.

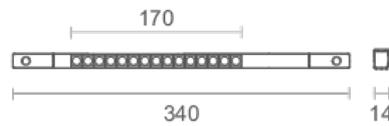

General specifications

| | |
|-----------------------------|--|
| Designer | Ivela Design Team |
| Commercial brand | Miniroller |
| Installation environment | Interior |
| Native mounting type | Track mounted |
| Mounting type | Track attachment |
| Ideal application locations | Residential, Hospitality, Showroom, Museum, Office, Commercial space |
| Made in | Italy |

Physical specifications

| | |
|---------------------|-------------|
| Shape | Rectangular |
| Body material | Aluminum |
| Body finish | Matte |
| Body color | Black |
| Frontal material | Aluminum |
| Frontal finish | Matte |
| Frontal color | Black |
| Thermal dissipation | Passive |
| IP | IP20 |

Lighting specifications

| | |
|---------------------|--------|
| N° of light sources | 1 |
| Lumen | 1320 |
| L.O.R. (%) | 81 |
| Nominal Lumen | 1650 |
| Power | 17 |
| Light type | White |
| CCT | 3000K |
| CRI | 90 |
| SDCM | 3 |
| RG | RG1 |
| Life time | L80B10 |
| LB value @ h | 50000 |

Optical specifications

| | |
|---------------------------|--------------------------|
| Emission type | Direct monoemission |
| Light beam distribution | Symmetric |
| Beam | 50 |
| Optics type | Symmetrical optical lens |
| Optical diffuser finish | Transparent |
| Optical diffuser material | PMMA |
| Orientability | Fixed |

Electrical specifications

| | |
|--------------------------------|----------------------------------|
| Power supply position | Remote |
| CV / CC converter availability | Included |
| CV / CC converter position | Internal |
| Dimmable | Yes |
| Dimming type | PWM Dimming |
| Power supply voltage type | DC |
| Power supply type | Voltage |
| Input Voltage (V) | 48 |
| Insulation class | III |
| Light source type | LED COB |
| Energy efficiency class | F |
| Replaceable light source | Replaceable by skilled personnel |

Dimensions and weight

| | |
|-------------|-----|
| Length (mm) | 340 |
|-------------|-----|

Width (mm) 14

General conditions

Warranty 5 years
