



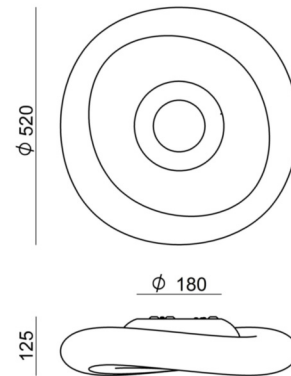

Ceiling Lights | 220-240 V | 1x2GX13
7792



Technical data	
Construction year	2014
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 22 W
Lamp cap	1 x 2GX13
Frequency	50 - 60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	2.540 Kg

Finishing casing

Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser

Material	PE
Colour	neutral



Ceiling Lights | 220-240 V | 1x2GX13 | Base
7792

Double emission ceiling lights for indoor application. Fluorescent lamp included 22W, lamp cap 1x2GX13.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pe. The ingress protection degree is IP40; the total weight is of 2.540 kg.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	65 %
Source lumens	1900 lm
Delivered lumens	1242 lm
Consumption	23 W
Luminaire efficacy	82 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
UGR axial	< 16
UGR transversal	< 16
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	122°
C90/C270 optics	115°

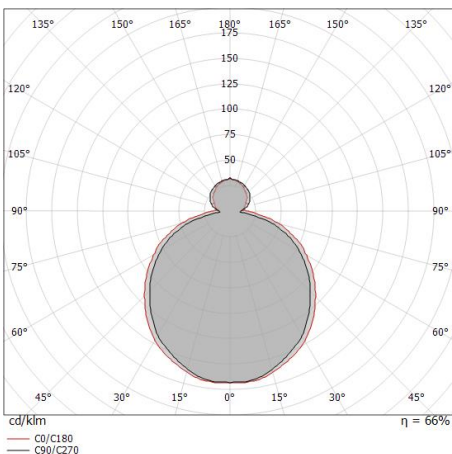

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.58 1.80	1277	98	73	
1.0	3.15 3.61	319	25	18	
1.5	4.73 5.41	142	11	8	
2.0	6.30 7.22	80	6	5	
2.5	7.88 9.02	51	4	3	
3.0	9.45 10.82	35	3	2	

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 122.0°)
— C90/C270 (Half-peak divergence: 115.2°)