



# BTNM 202.30.55

Button Mini 200 (1xLED 24W 830/3000K 2400lm 55 °)

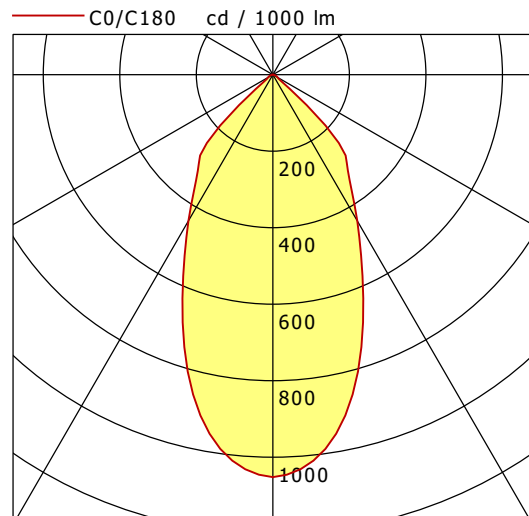

	C0	C90	C180	C270
0°	1052	1052	1052	1052
15°	835	835	835	835
30°	441	441	441	441
45°	223	223	223	223
60°	15	15	15	15
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

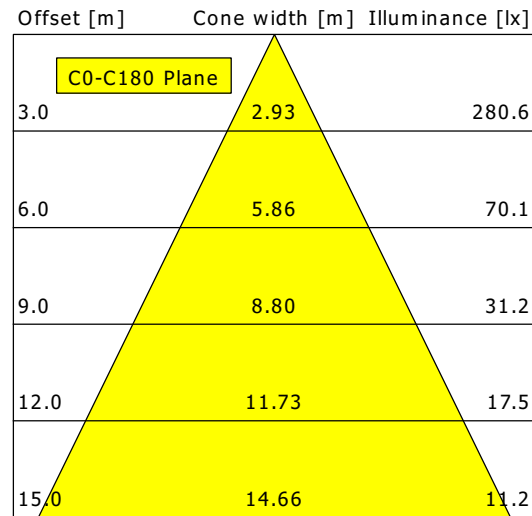

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	24 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.5
UGR C90/C270	23.5
CIE Flux Codes	84 98 100 100 100
Ra/CRI	>80