


## Luminaire

Code 1208000APP  
Name ALPHABET OF LIGHT S LINEARE 240 - APP COMPATIBILE

## Measurem.

Code FTS1901509  
Name ALPHABET OF LIGHT S LINEARE 240 - APP COMPATIBILE

Luminaire Flux	6968.16 lm	Luminaire Power	63.00 W	Efficacy	110.61 lm/W	Efficiency	100.00%
Sources Flux	6968.16 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2400 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	2400 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.120000 m2		Emitting area on Plane 180°		0.120000 m2	
Emitting area on Plane 0°		0.120000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.145466 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6968.16 lm	
LED Flux=8601,6lm LED Power=58W Eff=81% EfcLed=148lm/W EfcLum=111lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040		B21	
F UTE	0.69 H + 0.31 T			B NBN		BZ 6	

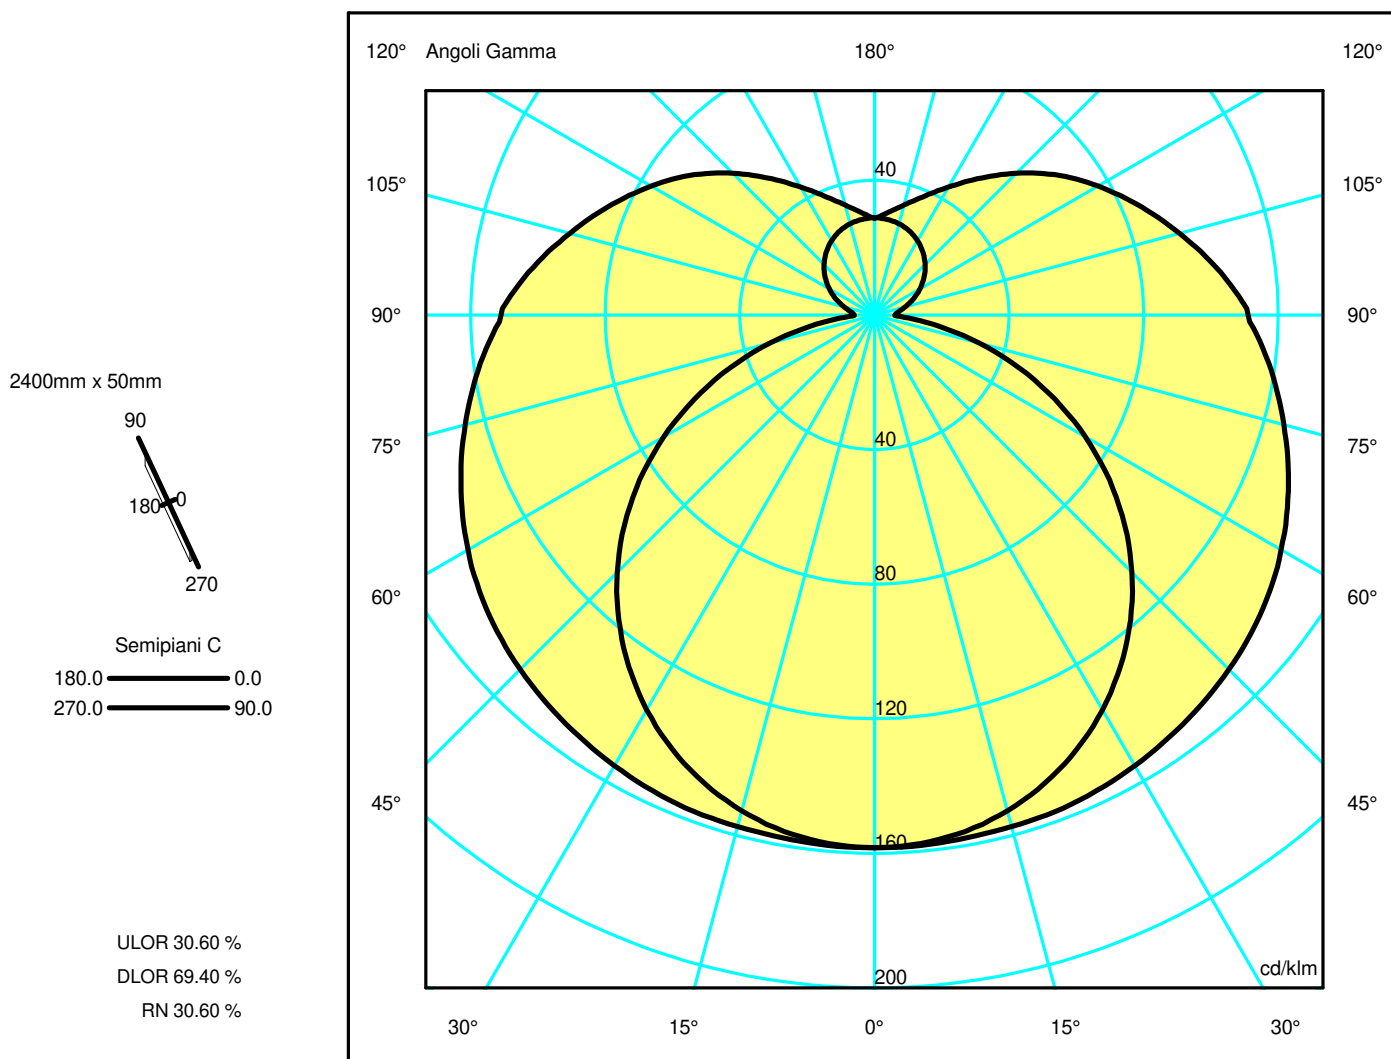

**Luminaire**

Code 1208000APP  
 Name ALPHABET OF LIGHT S LINEARE 240 - APP COMPATIBILE

**Measurem.**

Code FTS1901509  
 Name ALPHABET OF LIGHT S LINEARE 240 - APP COMPATIBILE

Luminaire Flux	6968.16 lm	Luminaire Power	63.00 W	Efficacy	110.61 lm/W	Efficiency	100.00%
Sources Flux	6968.16 lm	Maximum value	158.36 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2400 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	2400 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.120000 m2		Emitting area on Plane 180°		0.120000 m2	
Emitting area on Plane 0°		0.120000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.145466 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6968.16 lm	
LED Flux=8601,6lm LED Power=58W Eff=81% EfcLed=148lm/W EfcLum=111lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 83 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0