

# Audo

COPENHAGEN



TUBULAIRE COLLECTION  
Designed by *Krøyer-Sætter-Lassen*

TUBULAIRE PENDANT  
 Designed by *Krøyer-Sætter-Lassen*

Anodised, rippled aluminium pendant light with a bronzed brass surface and a textile suspension cable.



H24  
1780829



H48  
1771829

PRODUCT TYPE  
Pendant


COLLI  
1

ENVIRONMENT  
Indoor



DIMENSIONS

*H24*  
 H: 36 cm / 14,1"  
 H: 24 cm / 9,4"  
 Ø: 5,6 cm / 2,2"

*H48*  
 H: 72 cm / 27,5"  
 H: 48 cm / 18,8"  
 Ø: 5,6 cm / 2,2"

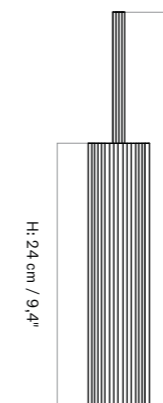

Ø: 5,6 cm / 2,2"

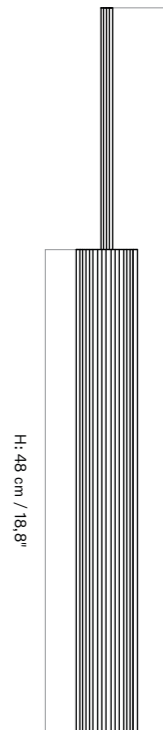

Ø: 5,6 cm / 2,2"

TECHNICAL SPECIFICATIONS

PRODUCTION PROCESS  
 The Tubulair pendant lamp features an aluminum extruded body with a refined anodized finish. The canopy is meticulously crafted through laser cutting, bending, and welding processes, ultimately adorned with a resilient powder-coated layer for durability and style.

COLOUR  
 Bronzed brass

MATERIALS  
 Aluminium

LIGHT SOURCE  
 CE: GU10 (Max 35 Watt)  
 US: GU10 (Max 20 Watt)

Bulb not included

VOLTAGE:  
 CE: 220-240V — 50/60 Hz  
 US: 110-130V — 60 Hz

WARRANTY  
 2 years

CANOPY  
 Black, ABS

CORD MATERIAL AND COLOUR  
 Textile, Black

CORD LENGTH  
 400 cm / 157,5"

CLASSIFICATION  
 IP20, Class II

CERTIFICATIONS  
 CE and ETL certified, tests can be obtained upon request.

MATERIALS & MAINTENANCE  
 Please visit [audocph.com](http://audocph.com) for materials, care and maintenance instructions.

TUBULAIRE PENDANT CANOPY, 3  
 Designed by *Krøyer-Sætter-Lassen*

Canopy with three pendant lights in rippled, anodised aluminium with a bronzed brass surface and a textile suspension cable.



CANOPY 3  
 1787829

PRODUCT TYPE  
 Canopy

COLLI  
 1

ENVIRONMENT  
 Indoor

DIMENSIONS  
 W/D: 20 cm / 7,8"  
 H1: 155 cm / 61"  
 H2: 186,5 cm / 73,4"  
 H3: 232,5 cm / 91,5"

PRODUCTION PROCESS  
 The Tubulair pendant lamp features an aluminum extruded body with a refined anodized finish. The canopy is meticulously crafted through laser cutting, bending, and welding processes, ultimately adorned with a resilient powder-coated layer for durability and style.

COLOUR  
 Bronzed brass

TECHNICAL SPECIFICATIONS

MATERIALS  
 Aluminium, Steel

LIGHT SOURCE  
 CE: GU10 (Max 35 Watt)  
 US: GU10 (Max 20 Watt)

Bulb not included

VOLTAGE:  
 CE: 220-240V — 50/60 Hz  
 US: 110-130V — 60 Hz

WARRANTY  
 2 years

CANOPY  
 Black, Metal

CORD MATERIAL AND COLOUR  
 Textile, Black



CORD LENGTH  
 400 cm / 157,5"

CLASSIFICATION  
 IP20, Class I

CERTIFICATIONS  
 CE and ETL certified, tests can be obtained upon request.

MATERIALS & MAINTENANCE  
 Please visit [audocph.com](http://audocph.com) for materials, care and maintenance instructions.

W/D: 20 cm / 7,8"

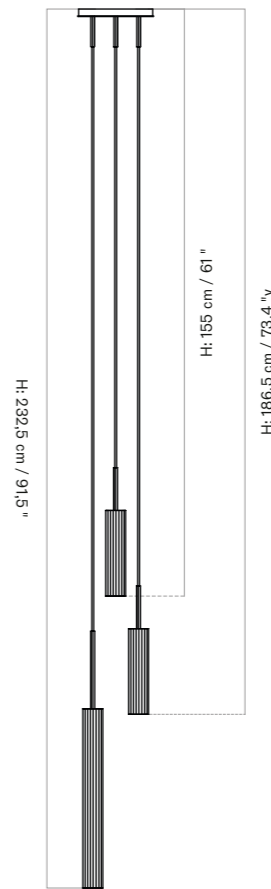


Suggested Cord Length

Cord length max: 400 cm / 157,4"  
 Cord length min: 10 cm / 3,9"

TUBULAIRE RAIL PENDANT  
 Designed by *Krøyer-Sætter-Lassen*

Black powder-coated metal suspension rail with three or five large pendant lights in rippled, anodised aluminium with a bronzed brass surface and a textile suspension cable.

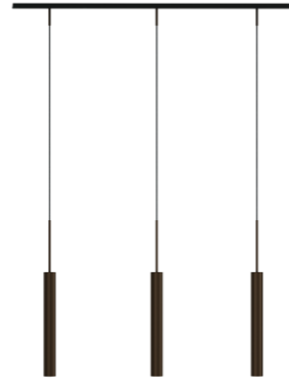

RAIL PENDANT 3  
 1782829



RAIL PENDANT 5  
 1783829

PRODUCT TYPE  
 Canopy

COLLI  
 1

ENVIRONMENT  
 Indoor

DIMENSIONS  
 N/A

PRODUCTION PROCESS  
 The Tubulair pendant lamp features an aluminum extruded body with a refined anodized finish. The canopy is meticulously crafted through laser cutting, bending, and welding processes, ultimately adorned with a resilient powder-coated layer for durability and style.

TECHNICAL SPECIFICATIONS

COLOUR  
 Bronzed brass

MATERIALS  
 Aluminium, Steel

LIGHT SOURCE:  
 CE:  
 3 x GU10 (Max 35 Watt) for Rail Pedant 3  
 5 x GU10 (Max 35 Watt) for Rail Pendant 5

US:  
 3 x GU10 (Max 20 Watt) for Rail Pedant 3  
 5 x GU10 (Max 20 Watt) for Rail Pendant 5

Bulb not included

VOLTAGE:  
 CE: 220-240V — 50/60 Hz  
 US: 110-130V — 60 Hz

WARRANTY  
 2 years

CANOPY  
 Black, Metal

CORD MATERIAL AND COLOUR  
 Textile, Black

CORD LENGTH  
 400 cm / 157,5"

CLASSIFICATION  
 IP20, Class I

CERTIFICATIONS  
 CE and ETL certified, tests can be obtained upon request.

MATERIALS & MAINTENANCE  
 Please visit [audocph.com](http://audocph.com) for materials, care and maintenance instructions.

TUBULAIRE CHANDELIER  
Designed by *Krøyer-Sætter-Lassen*

Black powder-coated metal suspension light with 6, 20 or 38 pendants in rippled, anodised aluminium with a bronzed brass surface and a textile suspension cable.



CHANDELIER 6  
1784829



CHANDELIER 20  
1785829



CHANDELIER 38  
1786829

PRODUCT TYPE  
Chandelier

COLLI  
1

ENVIRONMENT  
Indoor


DIMENSIONS

*Chandelier 6*  
H: 227,5 cm / 67,7"  
W: 56,6 cm / 22,2"


*Chandelier 20*  
H: 55,9 cm / 36,4"  
W: 106,6 cm / 41,9"

*Chandelier 38*  
H: 169,5 cm / 66,7"  
W: 156,6 cm / 61,6"

COLOUR  
Bronzed brass



W: 56,6 cm / 22,2"

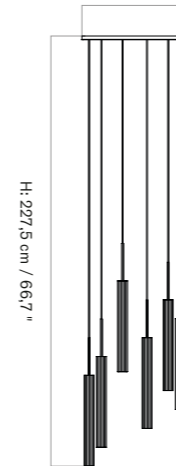

H: 227,5 cm / 66,7"

Suggested Cord Length  
Cord length max: 400 cm / 157,4"  
Cord length min: 10 cm / 3,9"

TECHNICAL SPECIFICATIONS

PRODUCTION PROCESS  
The Tubulair pendant lamp features an aluminum extruded body with a refined anodized finish. The canopy is meticulously crafted through laser cutting, bending, and welding processes, ultimately adorned with a resilient powder-coated layer for durability and style.


MATERIALS  
Aluminium, Steel

LIGHT SOURCE  
CE:  
6 x GU10 (Max 35 Watt) for Chandelier 6  
28 x GU10 (Max 35 Watt) for Chandelier 28  
38 x GU10 (Max 35 Watt) for Chandelier 38


US:  
6 x GU10 (Max 20 Watt) for Chandelier 6  
28 x GU10 (Max 20 Watt) for Chandelier 28  
38 x GU10 (Max 20 Watt) for Chandelier 38

Bulb not included

VOLTAGE:  
CE: 220-240V — 50/60 Hz  
US: 110-130V — 60 Hz




W: 106,6 cm / 41,9"




H: 142 cm / 55,9"

Suggested Cord Length  
Cord length max: 400 cm / 157,4"  
Cord length min: 10 cm / 3,9"



W: 156,6 cm / 61,6"

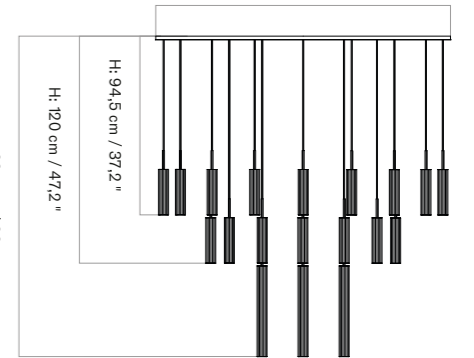

H: 169,5 cm / 66,7"

Suggested Cord Length  
Cord length max: 400 cm / 157,4"  
Cord length min: 10 cm / 3,9"

WARRANTY  
2 years

CANOPY  
Black, Metal

CORD MATERIAL AND COLOUR  
Textile, Black

CORD LENGTH  
400 cm / 157,5"

CLASSIFICATION  
IP20, Class I

CERTIFICATIONS  
CE and ETL certified, tests can be obtained upon request.

MATERIALS & MAINTENANCE  
Please visit [audocph.com](http://audocph.com) for materials, care and maintenance instructions.

TUBULAIRE CHANDELIER  
 Designed by *Krøyer-Sætter-Lassen*

Canopy for pendant lights in rippled, anodised aluminium with a bronzed brass surface and a textile suspension cable.



RAIL CANOPY  
1760530



CANOPY Ø57  
1765530



CANOPY Ø107  
1766530



CANOPY Ø157  
1767530

TECHNICAL SPECIFICATIONS

PRODUCT TYPE  
Canopy

COLLI  
1

ENVIRONMENT  
Indoor

DIMENSIONS

*Rail canopy*  
H: 2 cm / 0,7"  
W: 130 cm / 51,1"

*Canopy Ø57*  
H: 2,2 cm / 0,8"  
Ø: 56,6 / 22,2"

*Canopy Ø107*  
H: 2,2 cm / 0,8"  
Ø: 106,6 cm / 41,9"

*Canopy Ø157*  
H: 2,2 cm / 0,8"  
Ø: 156,6 cm / 61,6"

PRODUCTION PROCESS  
The Tubulair pendant lamp features an aluminum extruded body with a refined anodized finish. The canopy is meticulously crafted through laser cutting, bending, and welding processes, ultimately adorned with a resilient powder-coated layer for durability and style.

COLOUR  
Black

MATERIALS  
Steel

WARRANTY  
2 years


CLASSIFICATION  
IP20, Class I

CERTIFICATIONS  
CE and ETL certified, tests can be obtained upon request.

MATERIALS & MAINTENANCE  
Please visit [audocph.com](http://audocph.com) for materials, care and maintenance instructions.


TECHNICAL SPECIFICATIONS

*Rail Canopy*

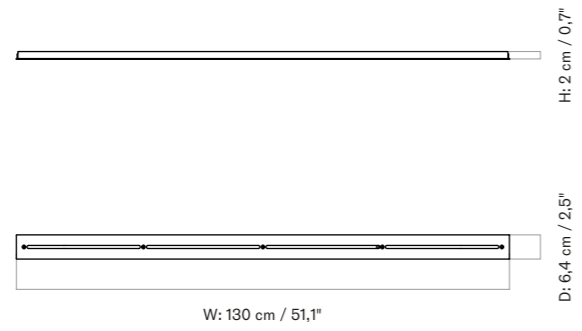


TECHNICAL SPECIFICATIONS

*Canopy Ø107*

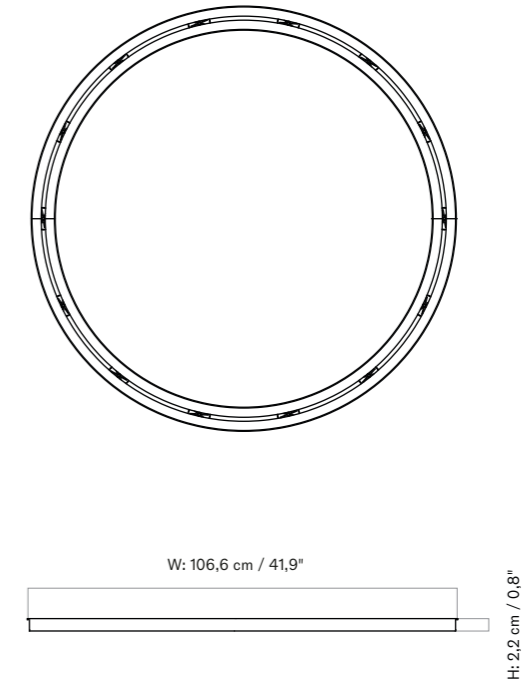

*Canopy Ø57*

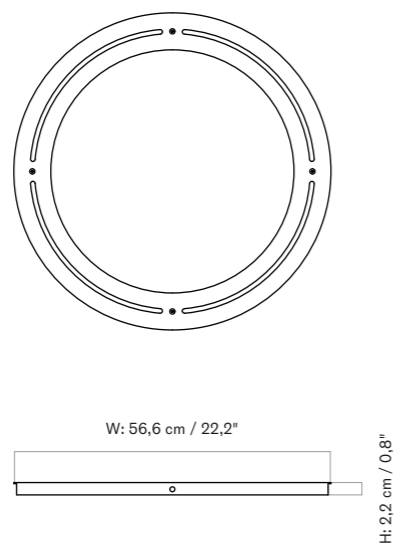

*Canopy Ø157*

