



SLC DL04 SQUARE X2 R83X2 WH TED 927 IP54 36°

14/01/2022

SLC1244

Product description

Square recessed luminaire in double version. Bright and with a colour rendering of CRI > 90. Low-lying LED for a pleasant light.

The DL04 Square X2 is a square, tiltable (25°) recessed luminaire in a double version
Contemporary design
Experience pleasant light with low glare and plenty of lumens
Suitable for outdoor use (IP54)
Driver included
Quick connect with loop-in / loop-out
CRI > 90 ensures vivid colours in any environment
16 mm cable tube



Technical data

| | | | |
|--------------------------------|---|---|----------------------|
| Suitable for built-in mounting | Yes | Suitable for ceiling mounting | Yes |
| Adjustability | Swivelling | Lamp type | LED not exchangeable |
| With light source | Yes | Material housing | Aluminium |
| Surface protection | Powder coating | Colour housing | White |
| Material cover | Plastic, transparent | Voltage type | AC/DC |
| Nominal voltage | 220 - 240 V | LED nominal current at constant current | 440 - 440 mA |
| Type of control gear | LED operating device current-controlled | Control gear included | Yes |
| Dimming phase cut-off | Yes | Reflector | High-gloss |
| Light distributor | Reflector | Light sharing | Symmetric |
| Beam angle | Medium beam 21-40° | Light outlet | Direct |







| | |
|---|-----------------------------|
| Rated life time L90/B10 at 25 °C | 100000 h |
| Protection class | II |
| Max. system power | 20 W |
| Colour temperature | 2700 - 2700 K |
| Rated luminous flux according to IEC 62722- | 1210 lm |
| Width | 190 mm |
| Length | 95 mm |
| Built-in height/depth | 56 mm |
| Type of wiring | Suitable for through wiring |
| Conductor cross section | 0,35 mm ² |
| Connection type | Plug clamp |
| Colour rendering index (CRI/Ra) | 90 |
| Tilt-able (°) | 25 |
| Cut-out hole (Ø: mm) | 2x83 |
| Dimmable | Yes |
| Brand | SLC |
| Produced by | The Light Group |

| | |
|--|---------------------------|
| Degree of protection (IP) | IP22 |
| Rated ambient temperature according to IEC | -20 - 45 °C |
| Colour of light | White |
| Colour rendering index CRI | 90-100 |
| Lamp efficacy | 60,5 lm/W |
| Height/depth | 56,4 mm |
| Built-in width | 183,5 mm |
| Built-in length | 83 mm |
| Number of poles | 2 |
| Connectable conductor cross section | 1,5 - 2,5 mm ² |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Beam angle (°) | 36 |
| Glare (UGR) | UGR<22 |
| Dimming method | Trailing edge |
| Dimming range | 1-100% |
| GTIN | 7070938065627 |


CREE-CXA1507-4-011213-3719005-2700K-200mA

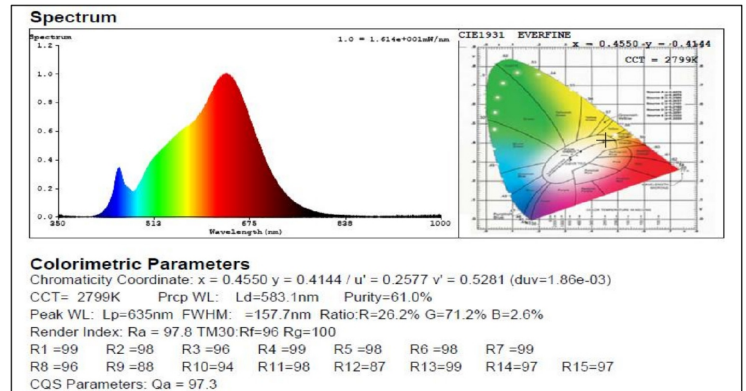





 **ENERG** 


Scandinavian Lighting Concept
SLC1244


A 


B 

C 

D 

E 

F  

G 

17
kWh/1000h

 2019/2015

