

**SLC DL04 SURFACE X2 WH 1557TED 930 IP21 36°**

14/01/2022

SLC1230**Product description**

The DL04 Surface X2 is an angular, tiltable surface-mounted luminaire with a contemporary design. Experience pleasant light with low glare and plenty of lumen.

Delivery complete with driver
 Deep LED for a pleasant light UGR <22
 Angular swivel surface-mounted luminaire in contemporary design
 Quick coupling with loop-in / loop-out
 CRI >90 enhances vivid colors in any environment
 Delivers plenty of light
 16mm cable tube

**Technical data**

Suitable for surface mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, transparent
LED nominal current at constant current	400 - 400 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct

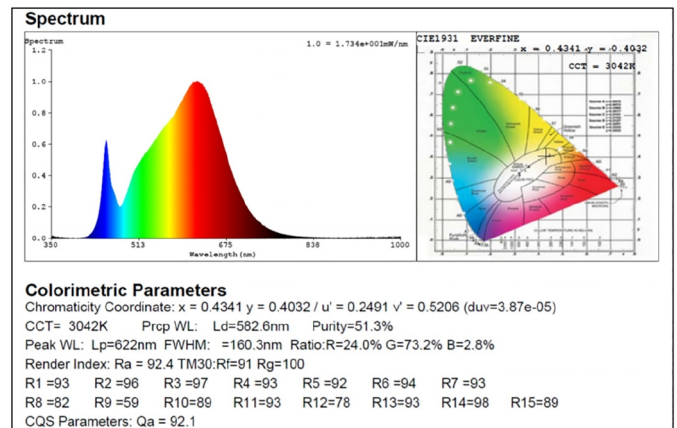
Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	White
Voltage type	AC/DC
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h







Degree of protection (IP)	IP21
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	97 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm ²
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

Protection class	I
Max. system power	16 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	1557 lm
Width	135 mm
Length	224 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm ²
Luminaire efficacy	102 lm/W
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065481






 **ENERG** 


Scandinavian Lighting Concept
SLC1230

A 

B 

C 


D 

E  

F 

G 

15
kWh/1000h



2019/2015

