

LIRO R

472-30019660

LIRO R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 30°, light output direct, IP20




DRAWING




45°

1 - 20 mm

62 x 62 mm, **ET 65 mm**

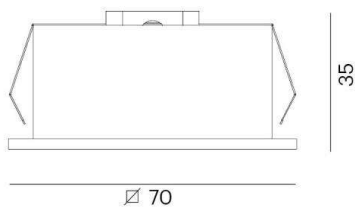

LIGHT DISTRIBUTION CURVE

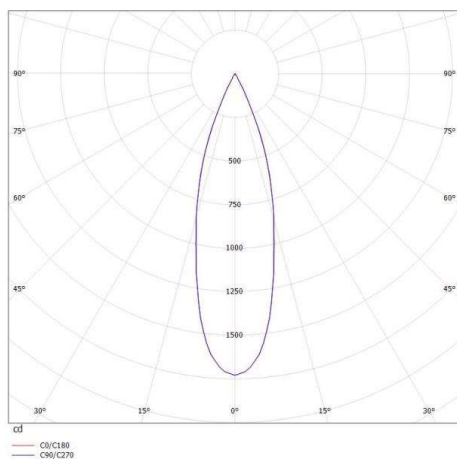

TECHNICAL DETAILS

Bulb type	LED 6W
Luminous flux [lm]	500
Colour temp. [K]	3000K
CRI	>90
Light output	direct
Beam angle [°]	30°
Voltage [V]	12 VDC
Material	aluminium
Length [mm]	70
Width [mm]	70
Height [mm]	35
Ceiling cutout [mm]	62x62
Recess depth [mm]	65
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,12
Color lamp	black
RAL	9005
EAN-Number	9010506139716
Lifetime [h]	25 000

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.