



## SLC DL04 SQUARE X2 R83X2 BL TED 927 IP54 36°

14/01/2022

**SLC1245**

### Product description

Square recessed luminaire in double version. Bright and with a colour rendering of CRI > 90. Low-lying LED for a pleasant light.

The DL04 Square X2 is a square, tiltable (25°) recessed luminaire in a double version  
Contemporary design  
Experience pleasant light with low glare and plenty of lumens  
Suitable for outdoor use (IP54)  
Driver included  
Quick connect with loop-in / loop-out  
CRI > 90 ensures vivid colours in any environment  
16 mm cable tube



### Technical data

Suitable for built-in mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Voltage type	AC/DC
LED nominal current at constant current	440 - 440 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct

Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Material cover	Plastic, transparent
Nominal voltage	220 - 240 V
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h

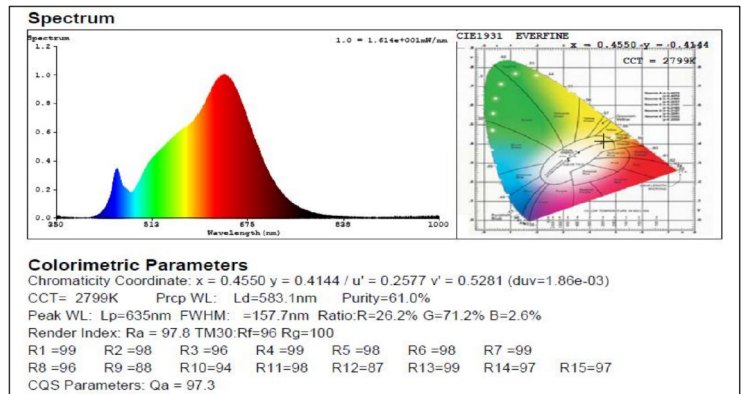






Degree of protection (IP)	IP22
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	60,5 lm/W
Height/depth	56,4 mm
Built-in width	183,5 mm
Built-in length	83 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm <sup>2</sup>
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065634

Protection class	II
Max. system power	20 W
Colour temperature	2700 - K
Rated luminous flux according to IEC 62722-	1210 lm
Width	190 mm
Length	95 mm
Built-in height/depth	56 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm <sup>2</sup>
Connection type	Plug clamp
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Cut-out hole (Ø: mm)	2x83
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

CREE-CXA1507-4-011213-3719005-2700K-200mA





 **ENERG** 


Scandinavian Lighting Concept  
SLC1245

---


A 

B 

C 

D 


E 

F  

G 

---

**17**  
kWh/1000h

 2019/2015

