

Luminaire


Code 0696020A
Name LOGICO MINI SOSPENSIONE

Measurerm.

Code FTS0002505
Name LOGICO MINI SOSPENSIONE

Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	280 mm	Height	230 mm		
Round Luminous Area		Diam.	280 mm	Height	230 mm		
Horizontal Luminous Area		0.061575 m ²		Emitting area on Plane 180°		0.064400 m ²	
Emitting area on Plane 0°		0.064400 m ²		Emitting area on Plane 270°		0.064400 m ²	
Emitting area on Plane 90°		0.064400 m ²		Glare area at 76°		0.077383 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1180.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		


Diam=280mm

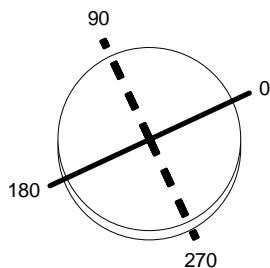

Semipiani C

180.0 ——— 0.0
270.0 - - - - 90.0

ULOR 38.21 %
DLOR 53.61 %
RN 41.62 %

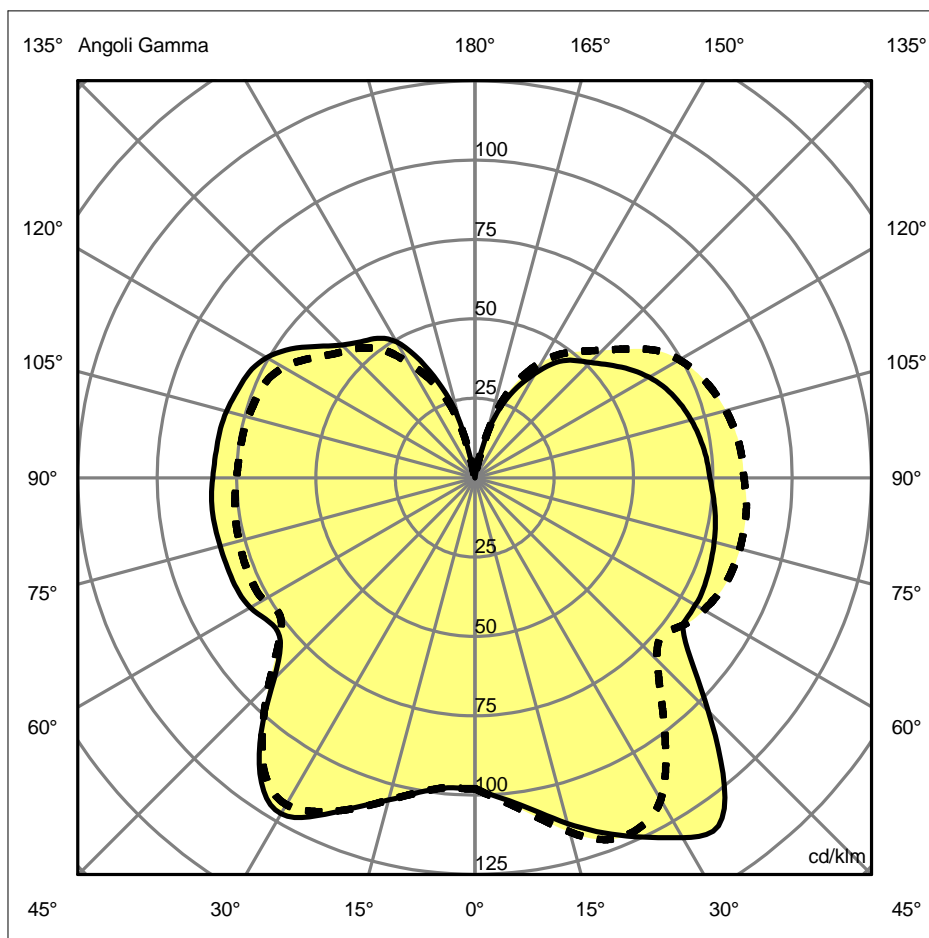

Luminaire

Code 0696020A
Name LOGICO MINI SOSPENSIONE

Measur.

Code FTS0002505
Name LOGICO MINI SOSPENSIONE

Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	280 mm	Height	230 mm		
Round Luminous Area		Diam.	280 mm	Height	230 mm		
Horizontal Luminous Area		0.061575 m2		Emitting area on Plane 180°		0.064400 m2	
Emitting area on Plane 0°		0.064400 m2		Emitting area on Plane 270°		0.064400 m2	
Emitting area on Plane 90°		0.064400 m2		Glare area at 76°		0.077383 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1180.00 lm	
70W HSGST E27							
C.I.E.	31 54 77 58 92			D DIN 5040	C21		
F UTE	0.54 H + 0.38 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Apertura a destra non trovata, gamma =34

Luminaire

Code 0696020A
Name LOGICO MINI SOSPENSIONE

Measurement

Code FTS0002505
Name LOGICO MINI SOSPENSIONE

Luminaire Flux	1083.47 lm	Luminaire Power	70.00 W	Efficacy	15.48 lm/W	Efficiency	91.82%
Lamps Flux	1180.00 lm	Maximum value	136.82 cd/klm	Position	C=75.00 G=30.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	9.5	10.5	10.3	11.3	12.3	9.4	10.4	10.3	11.3	12.3
x=2H y=3H	12.2	13.1	13.0	14.0	14.8	12.0	12.9	12.8	13.8	14.8
x=2H y=4H	13.6	14.5	14.5	15.3	16.1	13.3	14.2	14.2	15.1	16.1
x=2H y=6H	15.0	15.8	15.9	16.7	17.5	14.7	15.5	15.5	16.4	17.5
x=2H y=8H	15.7	16.5	16.6	17.4	18.1	15.3	16.1	16.2	17.0	18.1
x=2H y=12H	16.4	17.2	17.3	18.1	18.8	16.0	16.7	16.9	17.6	18.8
x=4H y=2H	10.4	11.2	11.2	12.1	13.1	10.2	11.1	11.1	12.0	13.1
x=4H y=3H	13.2	13.9	14.1	14.9	15.8	13.0	13.7	13.9	14.6	15.8
x=4H y=4H	14.7	15.4	15.6	16.3	17.2	14.5	15.1	15.4	16.1	17.2
x=4H y=6H	16.3	16.9	17.2	17.8	18.7	16.0	16.6	16.9	17.5	18.7
x=4H y=8H	17.1	17.7	18.0	18.6	19.4	16.7	17.3	17.7	18.2	19.4
x=4H y=12H	17.9	18.4	18.8	19.4	20.2	17.5	18.0	18.4	19.0	20.2
x=8H y=4H	15.3	15.9	16.2	16.8	17.7	15.0	15.6	15.9	16.5	17.7
x=8H y=6H	17.1	17.6	18.0	18.5	19.4	16.8	17.2	17.7	18.2	19.4
x=8H y=8H	18.0	18.5	19.0	19.4	20.3	17.7	18.1	18.6	19.1	20.3
x=8H y=12H	19.0	19.4	20.0	20.3	21.2	18.6	19.0	19.6	20.0	21.2
x=12H y=4H	15.4	16.0	16.4	16.9	17.8	15.1	15.6	16.0	16.6	17.8
x=12H y=6H	17.3	17.7	18.3	18.7	19.6	16.9	17.4	17.9	18.3	19.6
x=12H y=8H	18.3	18.7	19.3	19.7	20.5	17.9	18.3	18.9	19.3	20.5