


Pendelleuchte | 198-264 V
36 topLED 13 W DC - 15 W AC | CRI 90
CA054DBBMDD

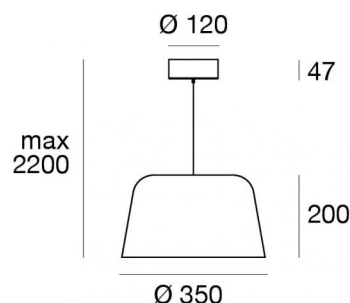

Technische Daten	
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Double Diffused
Light emission direction	downward
Lampe Nennleistung	13 W DC
Gesamtleistung	15 W
Lichtstrom (Lichtquelle)	1532 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV

Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text Black Ral 9005
Bearbeitungstyp	Lackierung

Oberfläche diffusor	
Material	Aluminium
Farbe	Text white Ral 9003
Bearbeitungstyp	Lackierung

Cables Electrification+suspension	
Max. Kabellänge	2000 mm

Pendelleuchte | 198-264 V | 36 topLED 13 W DC - 15 W AC | CRI 90
CA054DBBMDD

Double emission pendant luminaires for indoor application. The super warm white LED light source with a double diffused light distribution topped LED with CCT of 2700 K and a CRI 90; the source luminous flux is 1532 lm, with a 117.8 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text black ral 9005 finish, processed by means of coating; the diffuser is made of aluminium with a coating treatment. The ingress protection degree is IP20;

The total absorbed power is 15 W The power supply cable is included and features a 2 m length.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	63 %
Lichtstrom (Lichtquelle)	1532 lm
Leuchten Lichtstrom	973 lm
Consumption	15 W
Leuchten Lichtausbeute	64 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	
UGR	
UGR axial	17
UGR transversal	16.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	105°
Light distribution simmetry	Symmetrical

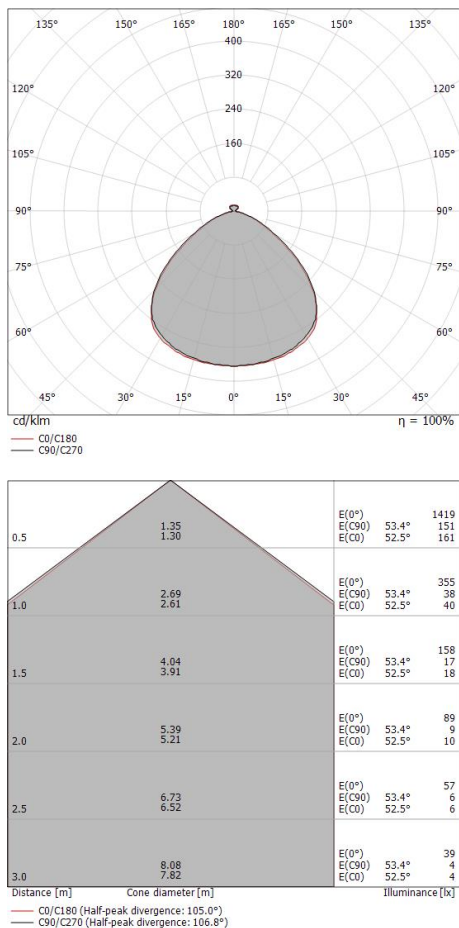


Delfi_P | Pendant Luminaires | Accessories
CA054DBBMDD



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit
Casambi
Radio-frequenza, 85-240V

Code
KIT0080