

## Luminaire


Code T081310  
Name CICLOPE terra 50 bilaterale 6W 3000K ruggine

## Measurerm.

Code FDS0000979  
Name CICLOPE terra 50 bilaterale 6W 3000K ruggine


Luminaire Flux	765.44 lm	Luminaire Power	13.00 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	765.44 lm	Maximum value	251.23 cd/klm	Position	C=90.00 G=60.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	50 mm 90 mm	Width Height	170 mm 0 mm	Height	1 mm	
Horizontal Luminous Area	0.006362 m2	Emitting area on Plane 180°		0.000000 m2			
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2			
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.001539 m2			
Coordinate system	CG	Symmetry Type		Double Symmetrical			
Date	17-05-2013	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		765.44 lm			
LED Flux=1190,6lm LED Power=10W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	23 52 79 79 100	D DIN 5040		B11			
F UTE	0.79 J + 0.21 T	B NBN		BZ 9 / 0.8 / BZ 8 / 2.5 / BZ 7			

50mm x 170mm



Semipiani C  
180.0 ——— 0.0  
270.0 - - - - - 90.0

ULOR 21.03 %  
DLOR 78.97 %  
RN 21.03 %

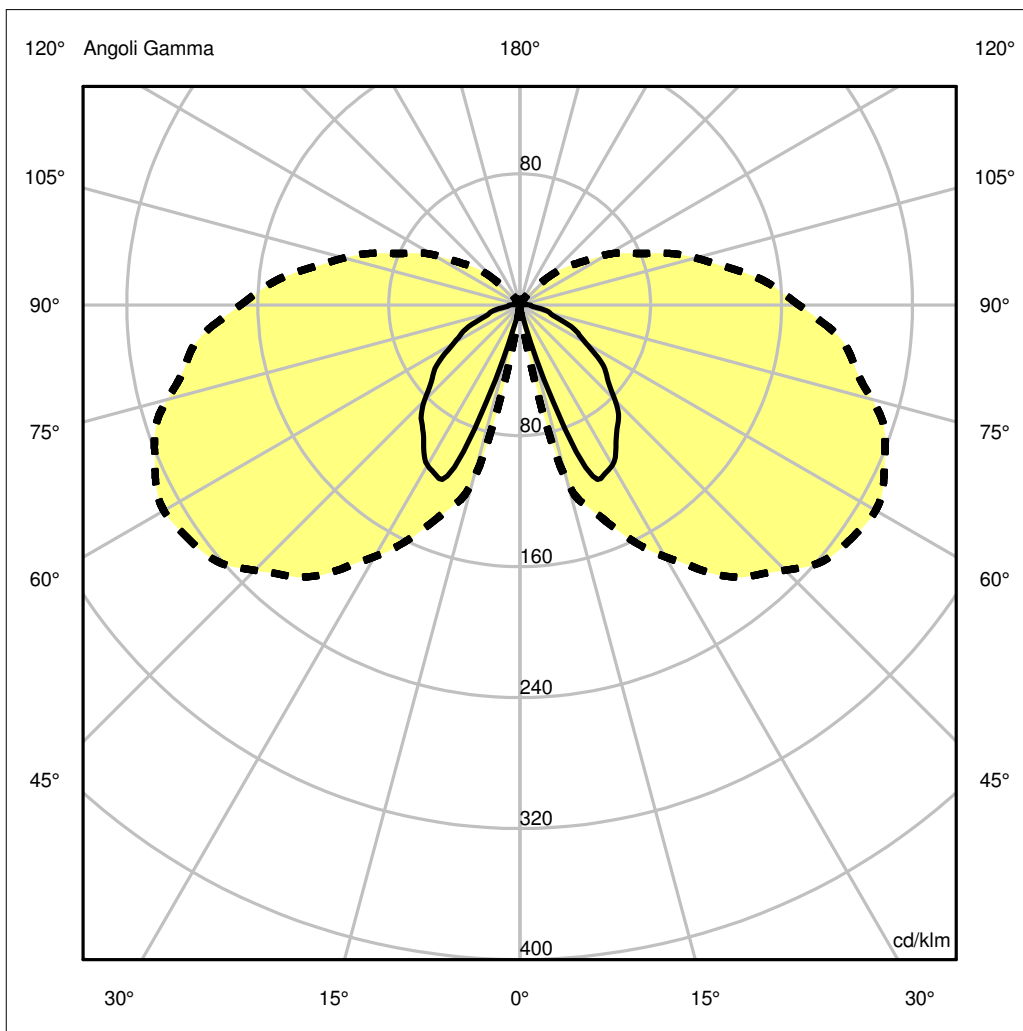

**Luminaire**

Code T081310  
 Name CICLOPE terra 50 bilaterale 6W 3000K ruggine

**Measur.**

Code FDS0000979  
 Name CICLOPE terra 50 bilaterale 6W 3000K ruggine

Luminaire Flux	765.44 lm	Luminaire Power	13.00 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	765.44 lm	Maximum value	251.23 cd/klm	Position	C=90.00 G=60.00	CG	Double Symmetrical
Rectangular Luminaire		Length	50 mm	Width	170 mm	Height	1 mm
Round Luminous Area		Diam.	90 mm	Height	0 mm		
Horizontal Luminous Area		0.006362 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001539 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-05-2013		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		765.44 lm	
LED Flux=1190,6lm LED Power=10W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	23 52 79 79 100			D DIN 5040	B11		
F UTE	0.79 J + 0.21 T			B NBN	BZ 9 / 0.8 / BZ 8 / 2.5 / BZ 7		

Could not find 90270 right beam angle•gamma0180=25

Could not find 90270 right beam angle•gamma0180=25

Could not find 90270 right beam angle•gamma0180=25