
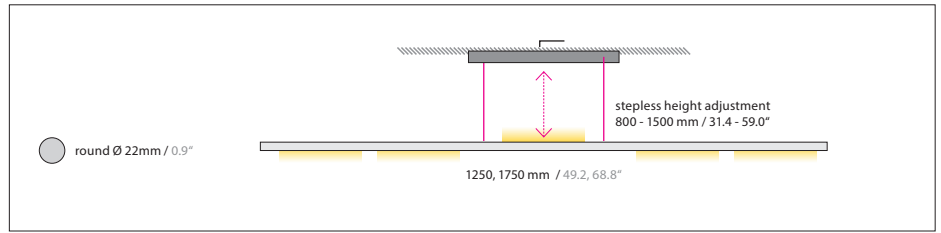


## PALITO LINEA


Housing: Pendant light, solid aluminium housing  
 Design: Ulrich Sattler | Michael Schmidt, Code2design

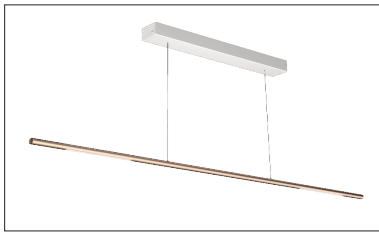


	Size: Ø / L mm	Inches	LED Watt direct / indirect	Lumen <sup>1)</sup> direct / indirect	Weight <sup>2)</sup> kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
<b>SIZE</b>	<b>Ø 22 / L 1250 mm</b>	<b>Ø 0.9 / L 49.2"</b>	10 / 5	1.260 / 630		<b>1545.</b>	x x x.	x x x.	x x x.	x x x.	x x x x.	x
	<b>Ø 22 / L 1750 mm</b>	<b>Ø 0.9 / L 68.8"</b>	20 / 5	2.520 / 630		<b>1546.</b>	x x x.	x x x.	x x x.	x x x.	x x x x.	x
<b>LED</b>		<b>Standard: Warm-white</b>		<b>3000 K</b>		x x x.	<b>30.</b>	x x x.	<b>30.</b>	x x x.	x x x x.	x
CRI > 90 *CRI > 80		<b>Optional:</b>		4000 K		x x x.	<b>40.</b>	x x x.	<b>40.</b>	x x x.	x x x x.	x
		Neutral-white		2700 K		x x x.	<b>27.</b>	x x x.	<b>27.</b>	x x x.	x x x x.	x
		Extra warm-white		2700 - 6500 K*		x x x.	<b>80.</b>	x x x.	<b>80.</b>	x x x.	x x x x.	x
		Tunable white										
		*(only with gesture control)										
<b>Dimming</b>		<b>Standard:</b>	TRIAC			x x x.	x x x.	<b>11.</b>	x x x.	x x x.	x x x x.	x
		<b>Optional:</b>	DALI			x x x.	x x x.	<b>61.</b>	x x x.	x x x.	x x x x.	x
			Dimming via gesture control			x x x.	x x x.	<b>21.</b>	x x x.	x x x.	x x x x.	x
<b>Finish</b>		<b>Standard:</b>	<b>66</b>	bronze anodised brushed		x x x.	x x x.	x x x.	x x x.	<b>.</b>	x x x x.	x
		<b>Optional:</b>	<b>60</b>	silver anodised brushed								
			<b>62</b>	black anodised brushed								
			<b>65</b>	champ. gold anodised brushed								
<b>Power supply cable</b>		<b>000</b>	current carrying suspension cables			x x x.	x x x.	x x x.	x x x.	x x x.	<b>000.</b>	x
<b>Mounting version</b>		<b>Canopy:</b>	Type	Size mm / inch		x x x.	x x x.	x x x.	x x x.	x x x.	x x x x.	<b>Y</b>
		<b>DBH 542</b>	<b>Mounting version Y</b>	542 x 68 x 53 mm / 21.3 x 2.7 x 2.1"								
				Colour white (12), similar RAL 9003								

Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz.

### 1250 indirect / direct

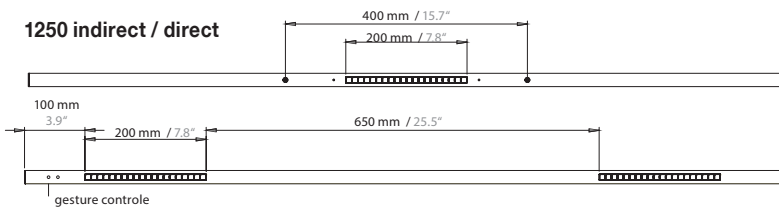

### 1750 indirect / direct

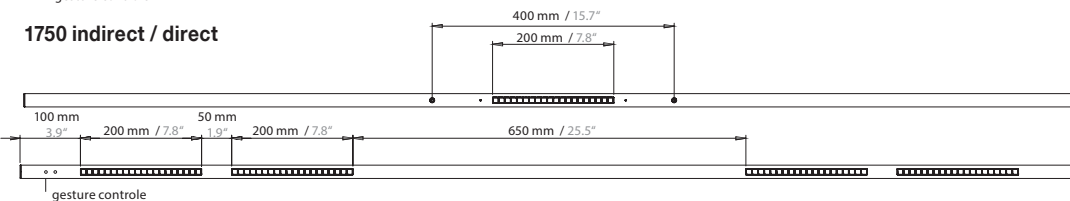

---	---	---	---	---	<b>000.</b>	<b>Y</b>
-----	-----	-----	-----	-----	-------------	----------

Complete order number

