

96634897 CETUS3 MSF 1000-840 EHF RWH

LED 8W CTU3_1000MSF_840	IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK06	⊕	CE	EAC	RoHS	REACH	850°C	T _a -20 +25
-------------------------	---------------------	-------	------	---------	------	---	----	-----	------	-------	-------	------------------------


Cetus

Surface mounted LED downlight. Fixed output LED driver. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 4000K LED


Dimensions: Ø181 x 182 mm
 Luminaire input power: 7.7 W
 Luminaire luminous flux: 1057 lm
 Luminaire efficacy: 137 lm/W
 Weight: 2.59 kg



TLG_CTU3_F_MSF_RWH.jpg

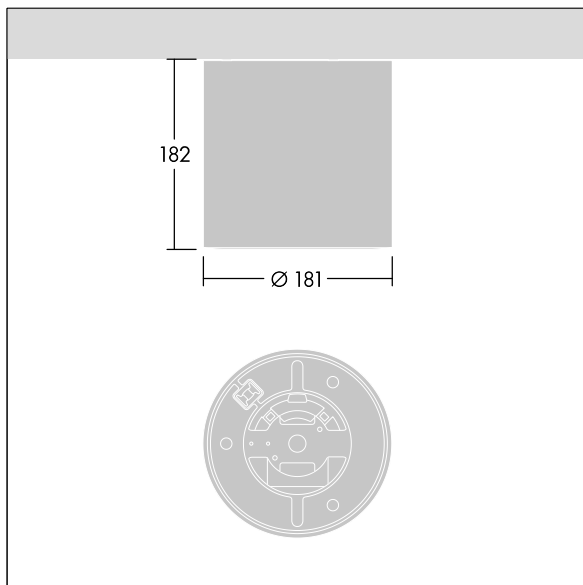

TLG_CTU3_M_MSF.wmf

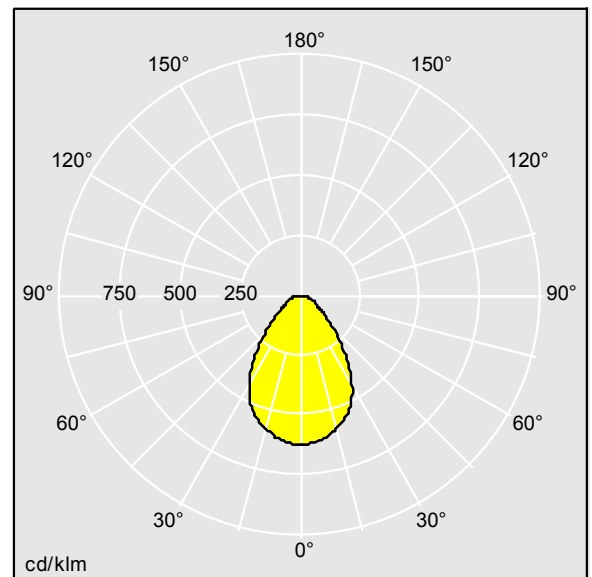

TLG_LE_1248.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1057 lm
 Luminaire efficacy*: 137 lm/W
 Colour Rendering Index min.: 80
 Ballast: 1 x 06891966 DRV TC PRFL 22W 500mA
 44V F #SC 127571
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Correlated colour temperature: 4000 Kelvin
 Chromaticity tolerance (initial MacAdam): 3
 Rated median useful life*:
 L80 50000h at 25°C
 Luminaire input power*: 7.7 W Power factor = 0.88
 Dimming: FIX
 Maintenance category: C - Closed Top Reflector

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.