


Ilio - Matte Black - White Integralis - App Compatible

Ernesto Gismondi



IP20   Dimmbar: +  -

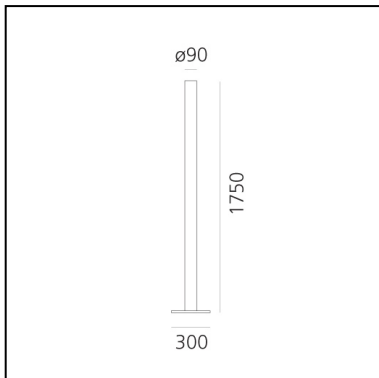

LUMINAIRE

DAY MODE

- Watt: **45W**
- Spannung (V): **220-240V**
- Lichtstrom (lm): **3920lm**
- Strahlungsstärke: **2651mW**
- CCT: **5000K**
- Efficiency: **88%**
- Efficacy: **87.11lm/W**
- CRI: **90**
- Dimmer Typology: **Microswitch Dimmer**

BESCHREIBUNG

With simple geometry, stripped of all formal digressions and reduced to its basics. A mono-material aluminum cylinder supports a 45W LED optical engine on the top, which produces high-efficiency diffused indirect light emission. With a flow of more than 3500 lumen, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

In the WHITE INTEGRALIS version, compatible with Artemide App, Ilio is designed to offer a white emission ensuring perfect perception while respecting the human presence and which at the same time combines control of microbial growth. It can vary in intensity and is available with a fixed CCT of 5000K, with a high color rendering index (CRI 90).

ARTIKELNUMMER: 1640080IN0APP

FUNKTIONEN

- Artikelnummer: **1640080IN0APP**
- Farbe: **Matte Black**
- Installation: **Stehleuchte**
- Material: **Aluminium, steel**
- Serie: **Design Collection**
- Anwendungsbereich: **Innenbeleuchtung**
- Einsatzbereich: **Hospitality, Residential**
- Lichtverteilung: **indirektes Licht**
- design: **Ernesto Gismondi**

DIMENSION

- Höhe: **cm 175**
- Breite: **cm 9**
- Länge Fuß: **cm 30**
- Breite Fuß: **cm 30**
- Widerstand: **N.D.**
- Glühdrahttest: **750°**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Farbtemperatur(K): **5000K**
- CRI: **90**
- Color Tolerance: **3SDCM**
- Service Life: **L80 (10K) 55000h**

ZUBEHÖR

Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP