

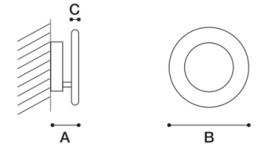


VERA
VERA 31

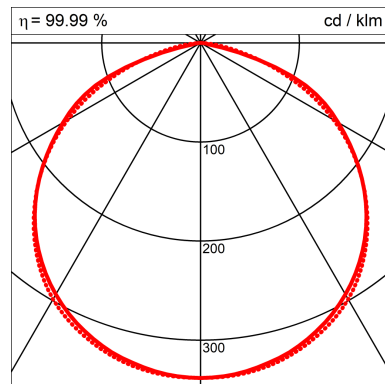

| Art. | A cm | B cm | C cm |
|---------|------|------|------|
| VERA 31 | 7/36 | 31 | 0,6 |
| VERA 26 | 7/32 | 26 | 0,6 |
| VERA 21 | 7/27 | 21 | 0,6 |

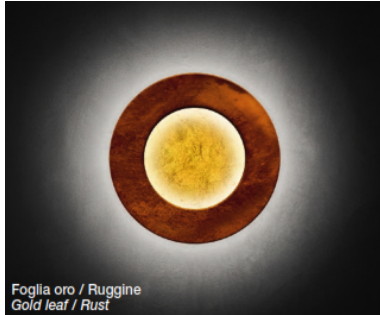

Classe energetica. Energy class.



Luminaires

| | |
|----------------|------------------------|
| Hersteller | ICONE |
| Article number | VERA 31 |
| Product name | VERA |
| Product group | wall-mounted luminaire |
| Mounting type | Surface mounted |
| Mounting place | Wall |
| Designer | Marco Pagnoncelli |
| Test mark | CE |

Model / Variant / Configuration

| | |
|---------------|---------|
| Number / Name | FO-RUST |
|---------------|---------|

Description

gold leaf + rust

Luminaires

| | |
|---------------------|--------------------|
| Absolute Photometry | |
| System Light flux | 3896.61 Lm |
| Luminaire output | 154.60 Lm/W |
| LiTG class | A40 |
| CIE flux codes | 47 80 97 100 100 |
| System power | 25.2W |
| Protection class | Protection class I |
| Protection degree | IP 20 |

Dimensions

| | |
|--------------------|-----------|
| Diameter/Height | 310mm/6mm |
| Installation depth | 1800 |

Light Source

| | |
|--------------------|-----------|
| Lamp type | 1 x LED |
| ZVEI / ILCOS | LED / LED |
| Lamp power | 25.2 W |
| System power | 25.2 W |
| Light flux | 3897 lm |
| Colour temperature | 3000K |
| Colour rendering | 1B |
| Lifetime | 50000 h |

Description

Wall or ceiling aluminium light fitting with different finishes and wattages.
Adjustable light disc, 360° parallel and 90° perpendicular.
Direct/indirect high efficiency LED light emission.
Also available in 2700°K LED color temperature.
Also available in 1-10V/push or DALI dimmable version.
Driver included.