

## Luminaire


Code 1034110A  
Name DIOSCURI 14 T

## Measurment.

Code FTS1801496  
Name DIOSCURI 14 T

Luminaire Flux	187.71 lm	Luminaire Power	4.14 W	Efficacy	45.34 lm/W	Efficiency	75.08%
Lamps Flux	250.00 lm	Maximum value	125.88 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	140 mm 140 mm	Height Height	1 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.015394 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.003724 m2	
Coordinate system Date Measurement Distance		CG 20-09-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 250.00 lm	
LIGHT SOURCE=OSRAM 4W 230V E14 Classic B25 2700K Eff=75% CCT=2700K Ra=80							
C.I.E. F UTE	10 30 60 26 75 --			D DIN 5040 B NBN	D13 BZ 10		

Diam=140mm




Semipiani C

180.0 ——— 0.0

ULOR 55.40 %

DLOR 19.68 %

RN 73.78 %

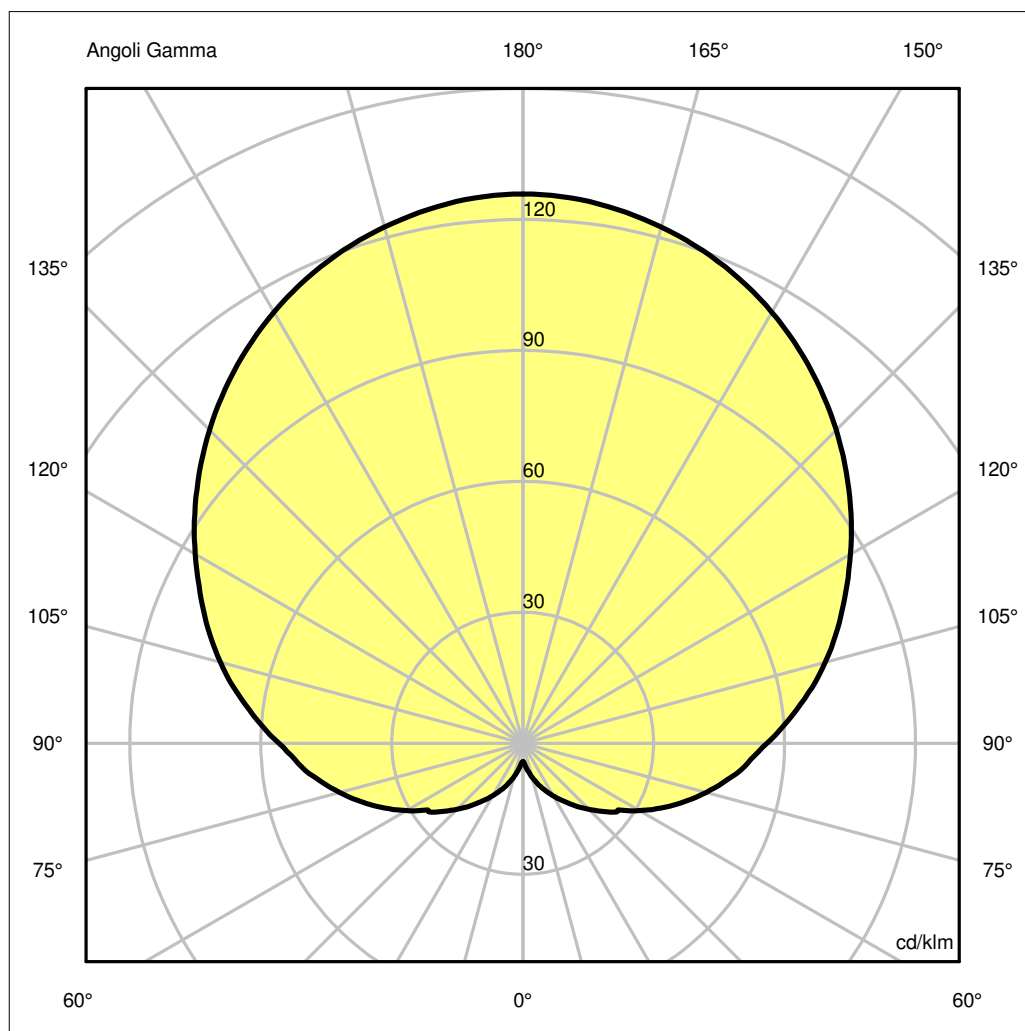

## Luminaire

Code 1034110A  
Name DIOSCURI 14 T

## Measurement


Code FTS1801496  
Name DIOSCURI 14 T

Luminaire Flux	187.71 lm	Luminaire Power	4.14 W	Efficacy	45.34 lm/W	Efficiency	75.08%
Lamps Flux	250.00 lm	Maximum value	125.88 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	140 mm 140 mm	Height Height	1 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.015394 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.003724 m2	
Coordinate system Date Measurement Distance		CG 20-09-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 250.00 lm	
LIGHT SOURCE=OSRAM 4W 230V E14 Classic B25 2700K Eff=75% CCT=2700K Ra=80							
C.I.E. F UTE	10 30 60 26 75 --			D DIN 5040 B NBN	D13 BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	8.40	16.80	25.21	33.61	42.01	OC	8.40	16.80	25.21	33.61	42.01
OB	8.40	16.80	25.21	33.61	42.01	OD	8.40	16.80	25.21	33.61	42.01

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	31.47	31.37	30.61	29.36	27.57	25.38	22.94	20.40	17.93	15.26
OB	31.47	31.37	30.61	29.36	27.57	25.38	22.94	20.40	17.93	15.26
OC	31.47	31.37	30.61	29.36	27.57	25.38	22.94	20.40	17.93	15.26
OD	31.47	31.37	30.61	29.36	27.57	25.38	22.94	20.40	17.93	15.26

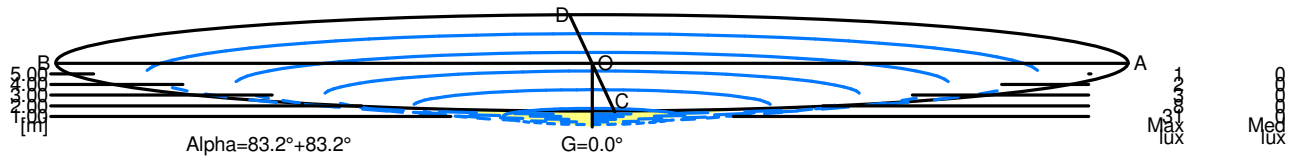

5.00	84.02	1	0		
4.00	67.22	2	0		
3.00	50.41	3	0		
2.00	33.61	8	0		
1.00	16.80	31	0		
H[m]	D[m]	Max lux	Med lux	Alpha=83.2°+83.2°	G=0.0