

## Ultrathin Series


# Constant Voltage LED Driver

LED恒压驱动器

## Features:

- Independent ultrathin design
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 独立式超薄紧凑设计
- 输入输出螺丝锁紧接线端子
- 输出开路, 短路, 过载和超温保护
- 符合安全特低电压标准
- 保护等级 II

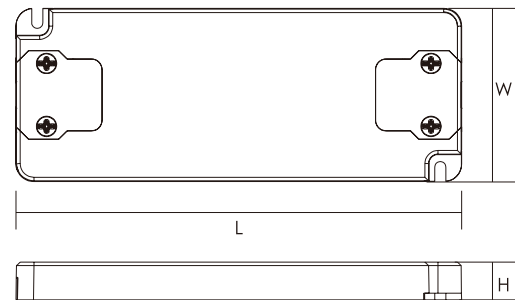

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
UT12V/6W	220-240	6	12	0-0.5	0.50C	75	<0.3	-20...+50	80	SELV	98x46x11	45
UT24V/6W	220-240	6	24	0-0.25	0.50C	76	<0.3	-20...+50	80	SELV	98x46x11	45
UT12V/12W	220-240	12	12	0-1.0	0.50C	78	<0.3	-20...+50	85	SELV	128x50x13	70
UT24V/12W	220-240	12	24	0-0.5	0.50C	81	<0.3	-20...+50	85	SELV	128x50x13	70
UT12V/20W	220-240	20	12	0-1.67	0.50C	80	<0.3	-20...+45	85	SELV	128x50x13	75
UT24V/20W	220-240	20	24	0-0.83	0.50C	82	<0.3	-20...+45	85	SELV	128x50x13	75
UT12V/30W	220-240	30	12	0-2.5	0.95	88	<0.5	-20...+40	90	SELV	155x53x16	105
UT24V/30W	220-240	30	24	0-1.25	0.95	89	<0.5	-20...+40	90	SELV	155x53x16	105
UT12V/50W	100-240	50	12	0-4.16	0.95	86	<0.5	-20...+50	85	SELV	185x62x22	230
UT24V/50W	100-240	50	24	0-2.1	0.95	86	<0.5	-20...+50	85	SELV	185x62x22	230

