

## Luminaire


Code 1277010A  
Name NH W - parete

## Measurem.

Code FTS1801116  
Name NH W - parete

Luminaire Flux	257.26 lm	Luminaire Power	4.00 W	Efficacy	64.31 lm/W	Efficiency	80.39%
Lamps Flux	320.00 lm	Maximum value	122.51 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	140 mm 140 mm	Height Height	140 mm 140 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.015394 m2 0.019600 m2 0.019600 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.019600 m2 0.019600 m2 0.022742 m2	
Coordinate system Date Measurement Distance		CG 10-11-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 320.00 lm	
Greenplux 4W E14 3000K 320 lm							
C.I.E. F UTE	32 59 81 70 80 0.56 H + 0.24 T			D DIN 5040 B NBN		B21 BZ 7 / 0.8 / BZ 6 / 1.25 / BZ 7 / 2.5 / BZ 6 / 3 / BZ 7	

Diam=140mm




Semipiani C

180.0 ——— 0.0

ULOR 24.07 %

DLOR 56.32 %

RN 29.94 %

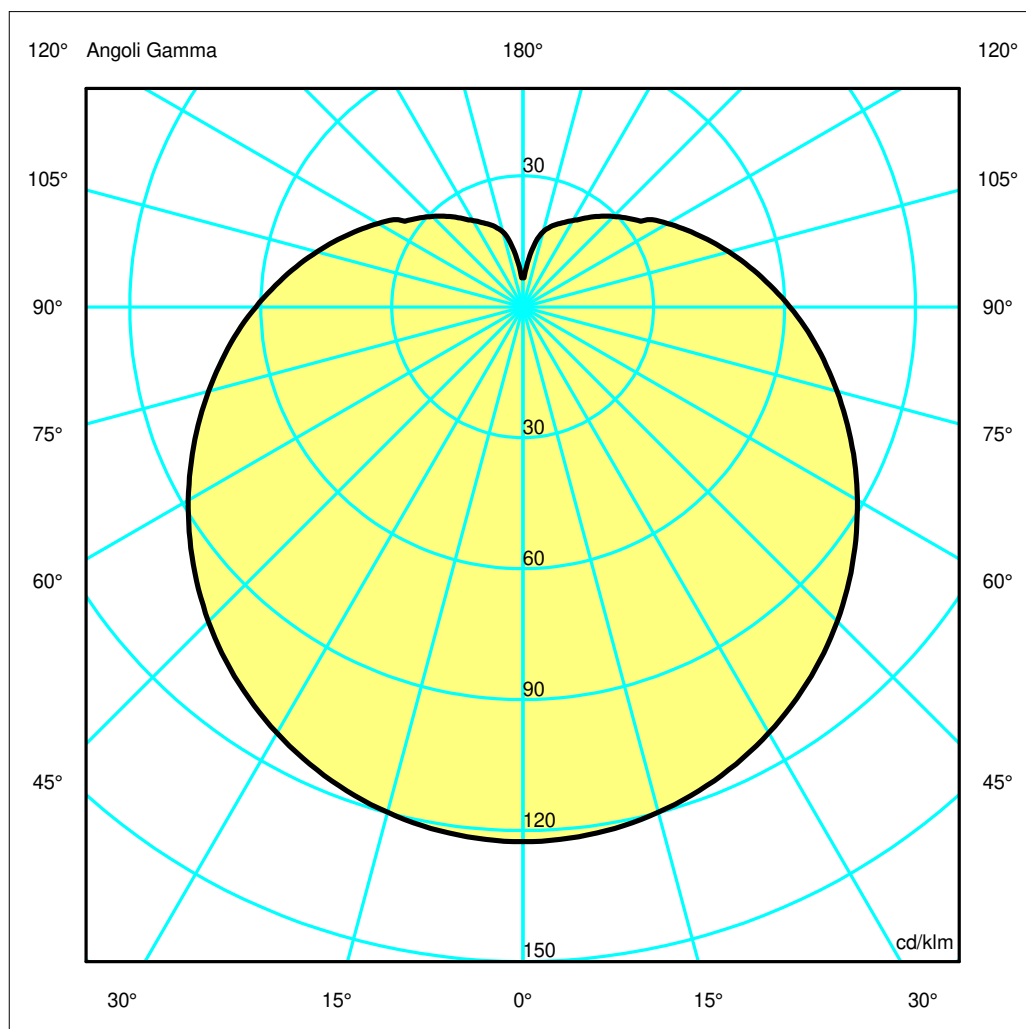

**Luminaire**

Code 1277010A  
Name NH W - parete

**Measurem.**

Code FTS1801116  
Name NH W - parete

Luminaire Flux	257.26 lm	Luminaire Power	4.00 W	Efficacy	64.31 lm/W	Efficiency	80.39%
Lamps Flux	320.00 lm	Maximum value	122.51 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	140 mm	Height	140 mm		
Round Luminous Area		Diam.	140 mm	Height	140 mm		
Horizontal Luminous Area		0.015394 m2		Emitting area on Plane 180°		0.019600 m2	
Emitting area on Plane 0°		0.019600 m2		Emitting area on Plane 270°		0.019600 m2	
Emitting area on Plane 90°		0.019600 m2		Glare area at 76°		0.022742 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		10-11-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		320.00 lm	
Greenplux 4W E14 3000K 320 lm							
C.I.E.	32 59 81 70 80			D DIN 5040	B21		
F UTE	0.56 H + 0.24 T			B NBN	BZ 7 / 0.8 / BZ 6 / 1.25 / BZ 7 / 2.5 / BZ 6 / 3 / BZ 7		

Apertura troppo larga

Apertura troppo larga