


## Luminaire

Code A246310  
Name Nur mini LED sospensione - opal diffuser 2700K anodizzato

## Measurem.

Code FTS1400148  
Name Nur mini LED sospensione - opal diffuser 2700K anodizzato

Luminaire Flux	1501.03 lm	Luminaire Power	30.00 W	Efficacy	50.03 lm/W	Efficiency	100.00%
Lamps Flux	1501.03 lm	Maximum value	351.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	365 mm	Height	270 mm		
Round Luminous Area		Diam.	352 mm	Height	0 mm		
Horizontal Luminous Area		0.097314 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.023542 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-02-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1501.03 lm	
LED Flux=2624,46lm LED Power=25W Eff=57% EfcLed=105lm/W EfcLum=50lm/W Ra=90 SDCM=2 L70(6K)=36300h							
C.I.E.	50 84 98 99 100			D DIN 5040		A31	
F UTE	0.99 D + 0.01 T			B NBN		BZ 4	

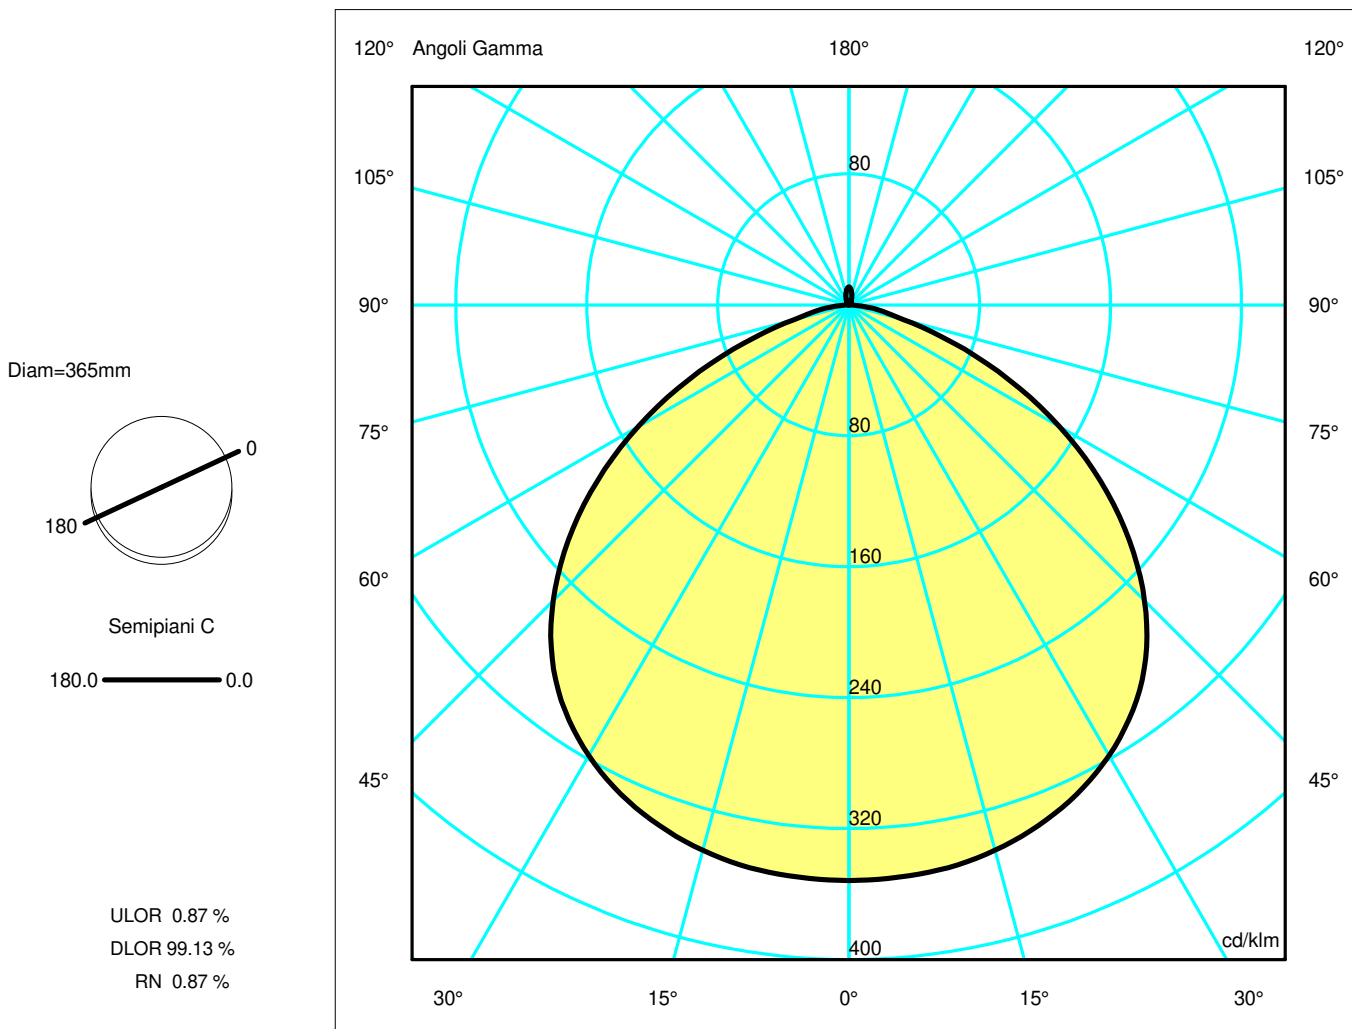

## Luminaire

Code A246310  
Name Nur mini LED sospensione - opal diffuser 2700K anodizzato

## Measurement


Code FTS1400148  
Name Nur mini LED sospensione - opal diffuser 2700K anodizzato

Luminaire Flux	1501.03 lm	Luminaire Power	30.00 W	Efficacy	50.03 lm/W	Efficiency	100.00%
Lamps Flux	1501.03 lm	Maximum value	351.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	365 mm	Height	270 mm		
Round Luminous Area		Diam.	352 mm	Height	0 mm		
Horizontal Luminous Area		0.097314 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.023542 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-02-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1501.03 lm	
LED Flux=2624,46lm LED Power=25W Eff=57% EfcLed=105lm/W EfcLum=50lm/W Ra=90 SDCM=2 L70(6K)=36300h							
C.I.E.	50 84 98 99 100			D DIN 5040	A31		
F UTE	0.99 D + 0.01 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.03	4.54	6.06	7.57	OC	1.51	3.03	4.54	6.06	7.57
OB	1.51	3.03	4.54	6.06	7.57	OD	1.51	3.03	4.54	6.06	7.57

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	527.75	526.78	517.75	494.88	453.93	383.47	281.64	161.88	52.18	11.27
OB	527.75	526.78	517.75	494.88	453.93	383.47	281.64	161.88	52.18	11.27
OC	527.75	526.78	517.75	494.88	453.93	383.47	281.64	161.88	52.18	11.27
OD	527.75	526.78	517.75	494.88	453.93	383.47	281.64	161.88	52.18	11.27

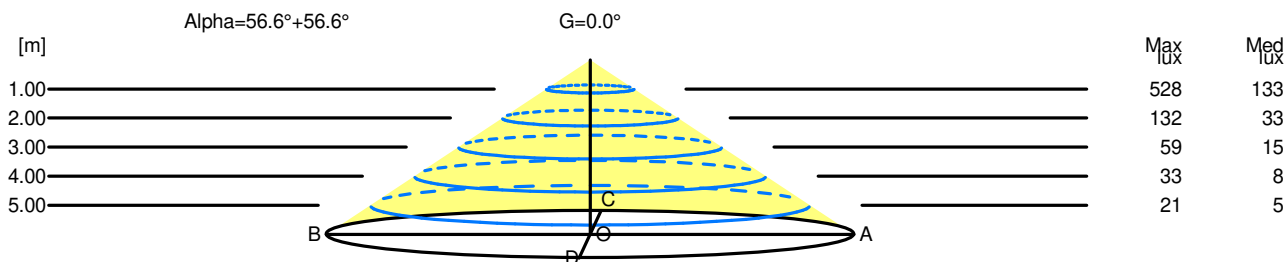

H[m]	D[m]	Max lux	Med lux	Alpha=56.6°+56.6°	G=0.0
1.00	3.03	528	133		
2.00	6.06	132	33		
3.00	9.08	59	15		
4.00	12.11	33	8		
5.00	15.14	21	5		