


Luminaire

Code 0181020A
Name Gople portable

Measur.

Code FTS2001261
Name Gople portable

Luminaire Flux	212.24 lm	Luminaire Power	2.40 W	Efficacy	88.43 lm/W	Efficiency	100.00%
Lamps Flux	212.24 lm	Maximum value	113.22 cd/klm	Position	C=0.00 G=137.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 130 mm Diam. 130 mm	Height	267 mm	Height	267 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.013273 m2 0.034710 m2 0.034710 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.034710 m2 0.034710 m2 0.036890 m2	
Coordinate system	CG	Symmetry Type				Rotosymmetrical	
Date	06-11-2020	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				212.24 lm	
C.I.E.				D DIN 5040		D12	
F UTE				B NBN		BZ 10	

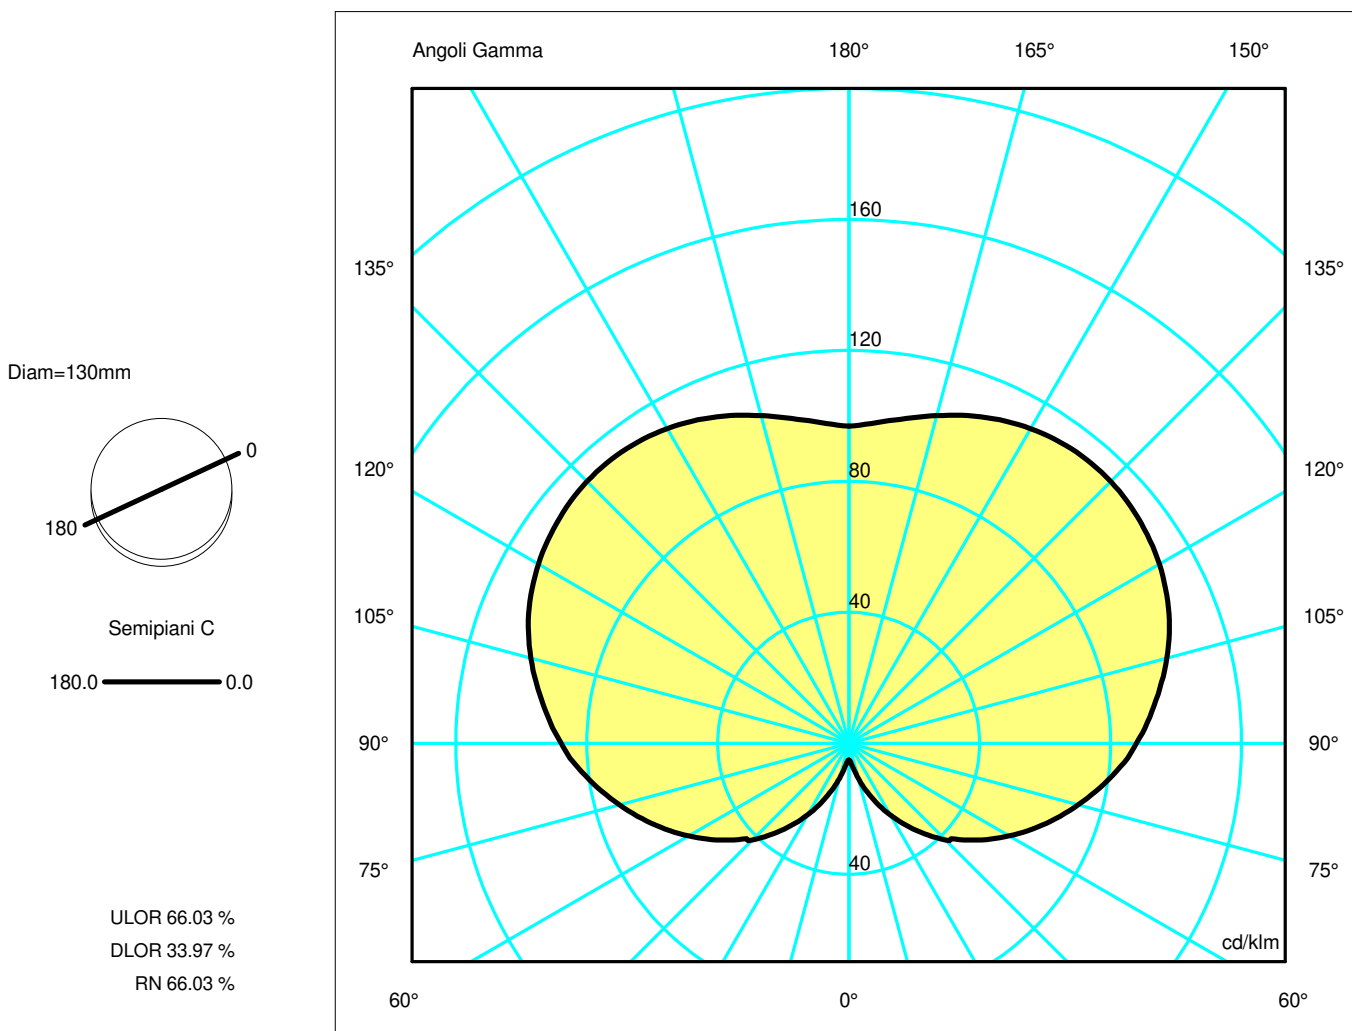

Luminaire

Code 0181020A
Name Gople portable

Measur.

Code FTS2001261
Name Gople portable

Luminaire Flux	212.24 lm	Luminaire Power	2.40 W	Efficacy	88.43 lm/W	Efficiency	100.00%
Lamps Flux	212.24 lm	Maximum value	113.22 cd/klm	Position	C=0.00 G=137.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	267 mm		
Round Luminous Area		Diam.	130 mm	Height	267 mm		
Horizontal Luminous Area		0.013273 m2		Emitting area on Plane 180°		0.034710 m2	
Emitting area on Plane 0°		0.034710 m2		Emitting area on Plane 270°		0.034710 m2	
Emitting area on Plane 90°		0.034710 m2		Glare area at 76°		0.036890 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		212.24 lm	
-							
C.I.E.	11 33 63 34 100			D DIN 5040		D12	
F UTE	--			B NBN		BZ 10	

Apertura a destra non trovata, gamma =43

Apertura a destra non trovata, gamma =43