Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Steinel Vertrieb GmbH

Supplier's address: Produktmanagement, Dieselstraße 80-84, 33442 Herzebrock-Clarholz, Germany

Model identifier: LS-0036

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	N.A.		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	2 704 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	29,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	241	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	213		
	Depth	186		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,382 0,386
Parameters for directional light sources:				
Peak luminous intensity (cd)		1 281	Beam angle in degrees, or the range of beam angles that can be set	51
Parameters for LED and OLED light sources:				
R9 colour rendering index value		0	Survival factor	0,90
the lumen maintenance factor		0,97		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,99	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,2

[a] '-' : not applicable;

[b] '-' : not applicable;

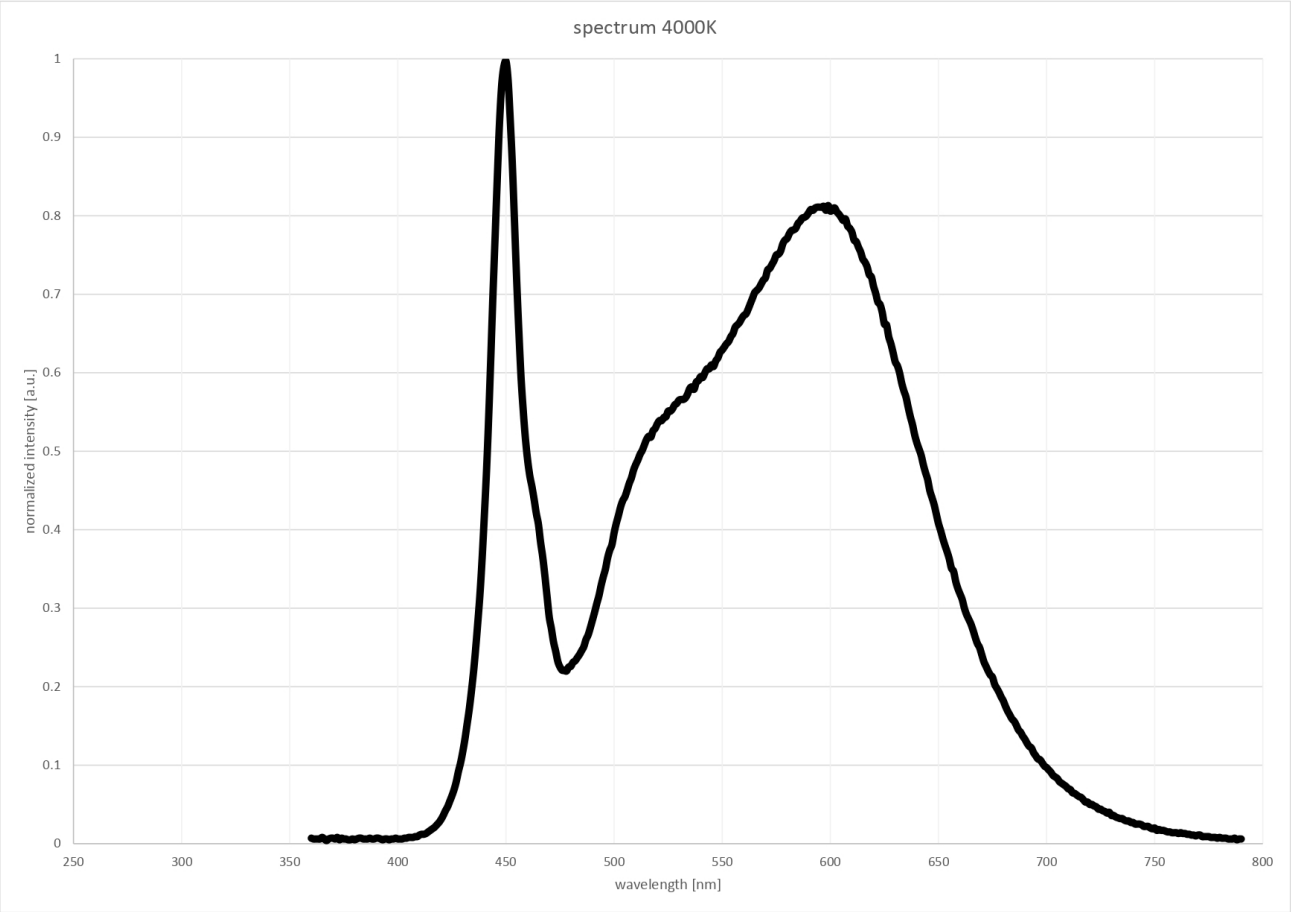
spectrum 4000K
normalized intensity [a.u.]
1
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
250
300
350
400
450
500
550
600
650
700
750
800
wavelength [nm]

Model placed on the Union market from 31/08/2021

EPREL registration number: 770945 https://eprel.ec.europa.eu/qr/770945

Supplier: Steinel GmbH (Manufacturer) **Website:** www.steinel.de

Customer care service:

Name: Produktmanagement **Website:** https://www.steinel.de

Email: info@steinel.de **Phone:** +49 5245 448 0

Address:
Dieselstraße 80-84, 33442 Herzebrock-Clarholz, Germany