


Luminaire

Code 1698010A
Name MINOMUSHI TERRA dimmerabile


Measurem.

Code FTS0002311
Name MINOMUSHI TERRA dimmerabile

Luminaire Flux	2527.00 lm	Luminaire Power	28.00 W	Efficacy	90.25 lm/W	Efficiency	100.00%
Lamps Flux	2527.00 lm	Maximum value	98.62 cd/klm	Position	C=260.00 G=101.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	580 mm 580 mm	Height Height	2100 mm 2100 mm		
Horizontal Luminous Area	0.264208 m2			Emitting area on Plane 180°	1.218000 m2		
Emitting area on Plane 0°	1.218000 m2			Emitting area on Plane 270°	1.218000 m2		
Emitting area on Plane 90°	1.218000 m2			Glare area at 76°	1.245738 m2		
Coordinate system	CG	Symmetry Type		Asymmetrical			
Date	12-04-2018	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		2527.00 lm			
LED Flux=2896,16lm LED Power=26W Eff=87% EfcLed=111lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	16 39 68 46 100	D DIN 5040		C12			
F UTE	--	B NBN		BZ 10			



ULOR 53.82 %
DLOR 46.18 %
RN 53.82 %

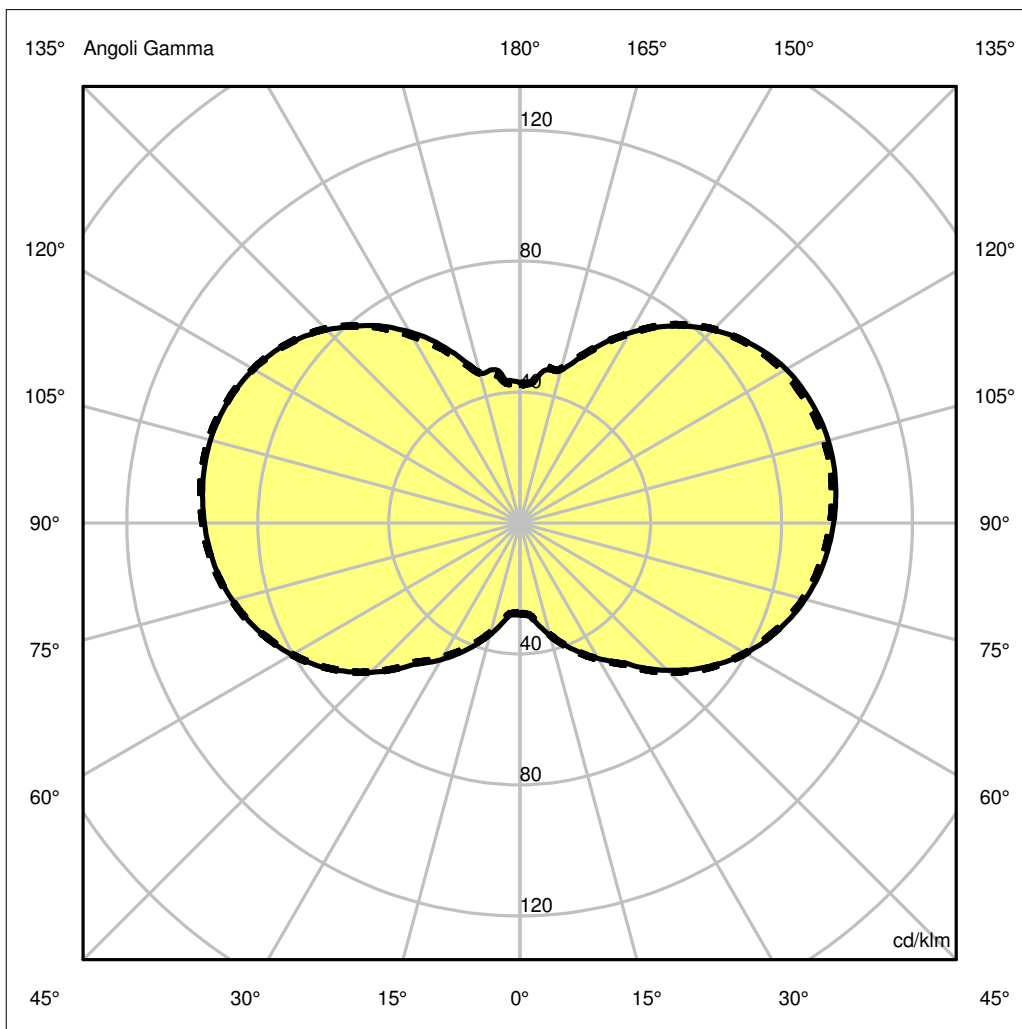

Luminaire

Code 1698010A
Name MINOMUSHI TERRA dimmerabile

Measur.

Code FTS0002311
Name MINOMUSHI TERRA dimmerabile

Luminaire Flux	2527.00 lm	Luminaire Power	28.00 W	Efficacy	90.25 lm/W	Efficiency	100.00%
Lamps Flux	2527.00 lm	Maximum value	98.62 cd/klm	Position	C=260.00 G=101.00	CG	Asymmetrical
Round Luminaire		Diam.	580 mm	Height	2100 mm		
Round Luminous Area		Diam.	580 mm	Height	2100 mm		
Horizontal Luminous Area		0.264208 m2		Emitting area on Plane 180°		1.218000 m2	
Emitting area on Plane 0°		1.218000 m2		Emitting area on Plane 270°		1.218000 m2	
Emitting area on Plane 90°		1.218000 m2		Glare area at 76°		1.245738 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		12-04-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2527.00 lm	
LED Flux=2896,16lm LED Power=26W Eff=87% EfcLed=111lm/W EfcLum=90lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	16 39 68 46 100			D DIN 5040	C12		
F UTE	--			B NBN	BZ 10		

Apertura a sinistra non trovata, gamma =-78

Apertura a sinistra non trovata, gamma =-78

Apertura a sinistra non trovata, gamma =-78