


# EDISON THE GIANT

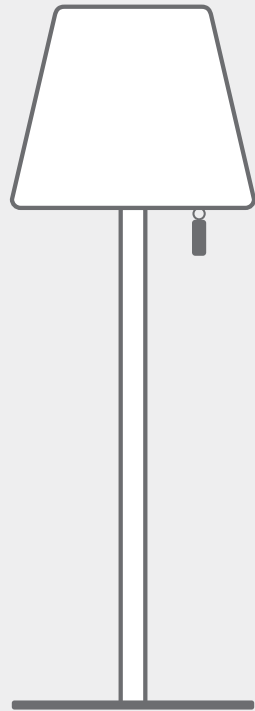

MANUAL

fatboy®

## Fatboy® product information Edison the Giant

Edison the Giant is a floor luminaire suitable for indoor and outdoor use containing a 2-tone LED light. The light source contains LED modules emitting 2700 K (warm white) and 6000 K (cool white) light. The tone of light smoothly changes as desired by turning the label. The brightness can be adjusted in 3 steps by pulling the label. The luminaire is protected IP55 (rain and spraywaterproof). The luminaire is also equipped with a Bluetooth module, which can be controlled by the Fatboy light control App.



## WARNING: READ CAREFULLY BEFORE USE!

When using outdoor, use portable luminaires. Basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

### READ ALL INSTRUCTIONS!

- Place the luminaire on a dry, horizontal surface. Uneven floors can cause the luminaire to fall which can cause damage to it.
- Do not expose the luminaire to excessive heat from heat sources.
- When using outdoor or at a wet location, use only on Ground Fault Circuit Interrupter (GFCI) protection circuit or receptacles. Keep plugs and receptacles dry.
- Check the voltage of your power supply. The voltage must be 120 VAC.
- Make sure the power plug is connect properly to a power socket.
- Keep the power socket away from rain or spraying water.
- Do not leave the luminaire outdoors during extreme stormy weather conditions.
- This luminaire is not a toy. Keep children away from the luminaire.
- The external cable cannot be replaced by the consumer; in case the cable gets damaged please contact your local Fatboy dealer in order to replace it by a new one.
- Suitable for Wet Location Use
- CAUTION: RISK OF ELECTRIC SHOCK, Do not use with extension cord near water or where water may accumulate. Keep lamp at least 16 feet from pools and spas.
- DO NOT SUBMERSE

- **IMPORTANT SAFETY INSTRUCTION:** This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

CAUTION: TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

### Instructions for use

Note: Carefully assemble the parts as illustrated in the installation guide.

The shade should be aligned with the red Fatboy label facing the front and the power cable facing the back. The red colored Fatboy label controls the light:

Starting position: the luminaire is switched off.

- Pull the label once: the light will turn on at 33% brightness.
- Pull it a second time: 66% brightness.
- Pull it a third time: full brightness.
- The fourth time the light will turn off.

Rotating the label left or right will change the color tone.

The complete change between the two color tones takes 2 times 360° turns.

### Using the Fatboy light control App

Go to the Google Play Store or App Store to download the 'Fatboy light control' App.

How to connect your Edison the Giant:

- Turn on the Bluetooth on your device.
- Pull the label and hold it for approximately 6 seconds until the colour of the light starts to change.
- Select the luminaire name on your device to connect.
- Now you are ready to use the App.

### Maintenance

Please make sure the cable doesn't get damaged. It would be recommended to check it once a while. When not in use for a long period of time we recommend to store the lamp indoors.

### Cleaning instructions

- Use a dry or moist cloth to clean dust or dirty spots.
- Do not use pressure to clean. Dirt spots should be cleaned gently to avoid scratches.
- Do not use cleaning agents containing alcohol, benzene, or abrasive substances.
- To avoid damaging the lamp, do not remove the shade for cleaning.

### Trouble shooting

The bottom plate has come loose:

- Make sure the power plug is disconnected from the power socket.
- Use the hexagon tool to tighten the single screw at the bottom.
- The rubber protectors under the bottom plate has come loose:
- Make sure the power plug is disconnected from the power socket.
- Try to attach the protector back on the bottom plate with a non-corrosive glue.
- Do not use protectors of different heights as it may cause the luminaire to become unstable causing damage.

The lamp doesn't respond to the Fatboy light control application:

- Make sure Bluetooth on your phone is turned on.
- Make sure your phone is within reach. Bluetooth reaches up to 30 meters.
- Another phone might be connected. It is only possible to control the lamp with one phone at a time. To switch phones, turn off Bluetooth on the connected phone.

## IMPORTANT!

Please contact your Fatboy® dealer if you have any other problems.

This luminaire contains a LED light source, which cannot be replaced by the end user and shall only be replaced by the manufacturer or his service agent.

When the light source reaches it's end of life, it shall only be replaced by the manufacturer or his service agent.

When the light source reaches it's end of life, it shall only be replaced by the manufacturer or his service agent.

When the light source reaches it's end of life, it shall only be replaced by the manufacturer or his service agent.

If the power cable is damaged do not try to repair it yourself. It shall only be replaced by the manufacturer or his service agent.

If the power cable is damaged do not try to repair it yourself. It shall only be replaced by the manufacturer or his service agent.

### SAVE THESE INSTRUCTIONS!

### Technical specifications

- Model: Edison the Giant
- Primary rating: 120 VAC, 50/60Hz 0.6A max.12W
- Secondary rating: 9 VDC, max 1.6 A
- Safety Class: Class II
- IP rating: IP55 (luminaire), IP44 (power plug ECG)
- Light source: Cree® XM-L2
- Bluetooth module: 4.0
- Cable: 5.5 yds/5 m
- Ambient temperature: 14 to 104 °F/-10 to 40 °C
- Materials: Polyethylene (shade), ABS (inner parts), aluminium (tube), metal (base)
- Dimensions: 22.8 inch/58 cm (diameter), 71.6 inch/182 cm (height)
- Total weight: 40 lbs/18.5 kg

#### FCC Statement

This device complies with part 15 of the FCC Rules/Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

#### UL listed

This product is produced and tested according to the UL153 Standards



#### CE-Directive

This product complies with the requirements and other relevant provisions of the current European RoHS and CE directives 2011/65/EC, 2014/30/EC and 2014/35/EC.



#### WEEE instructions

This product is subject to the provisions of the WEEE directive 2012/19/EU. Do not dispose of this Product together with regular household waste. Consult your local waste disposal authorities for information on collecting point for electrical and electronic waste products.



#### UL-Directive

The power cable complies with the stringent UL standards.



#### Terms of guarantee

We thank you for purchasing this Fatboy® product and trust that you will enjoy its use. Should you need to use our guarantee service, please contact your Fatboy® dealer. For more information about our dealers, please visit [www.fatboy.com](http://www.fatboy.com).

#### NOTE:

Changes or modifications which are not explicitly approved by the party responsible for compliance may void the user's authorization to use the equipment.

#### Fatboy® the Original B.V.

(EU, Asia & all other countries)  
P.O. Box 400  
5201 AK 's-Hertogenbosch

Het Zuiderkruis 3  
5215 MV 's-Hertogenbosch  
the Netherlands

☎ +31 (0) 88 7780 193  
@ [service@fatboy.com](mailto:service@fatboy.com)  
🌐 [www.fatboy.com](http://www.fatboy.com)

#### Fatboy® USA

(North & South America)  
875 West Sandy Lake Road, suite #100  
Coppell, Texas 75019