


## Luminaire

Code 1201Y00A  
Name Alphabet of light - Y

## Measur.

Code FTS1700212  
Name Alphabet of light - Y

Luminaire Flux	1366.00 lm	Luminaire Power	21.00 W	Efficacy	65.05 lm/W	Efficiency	100.00%
Lamps Flux	1366.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.633600 m2	
Emitting area on Plane 0°		0.633600 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.622763 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1366.00 lm	
LED Flux=1976,36lm LED Power=21W Eff=69% EfcLed=94lm/W EfcLum=65lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040		C11	
F UTE	0.50 J + 0.50 T			B NBN		BZ 9	

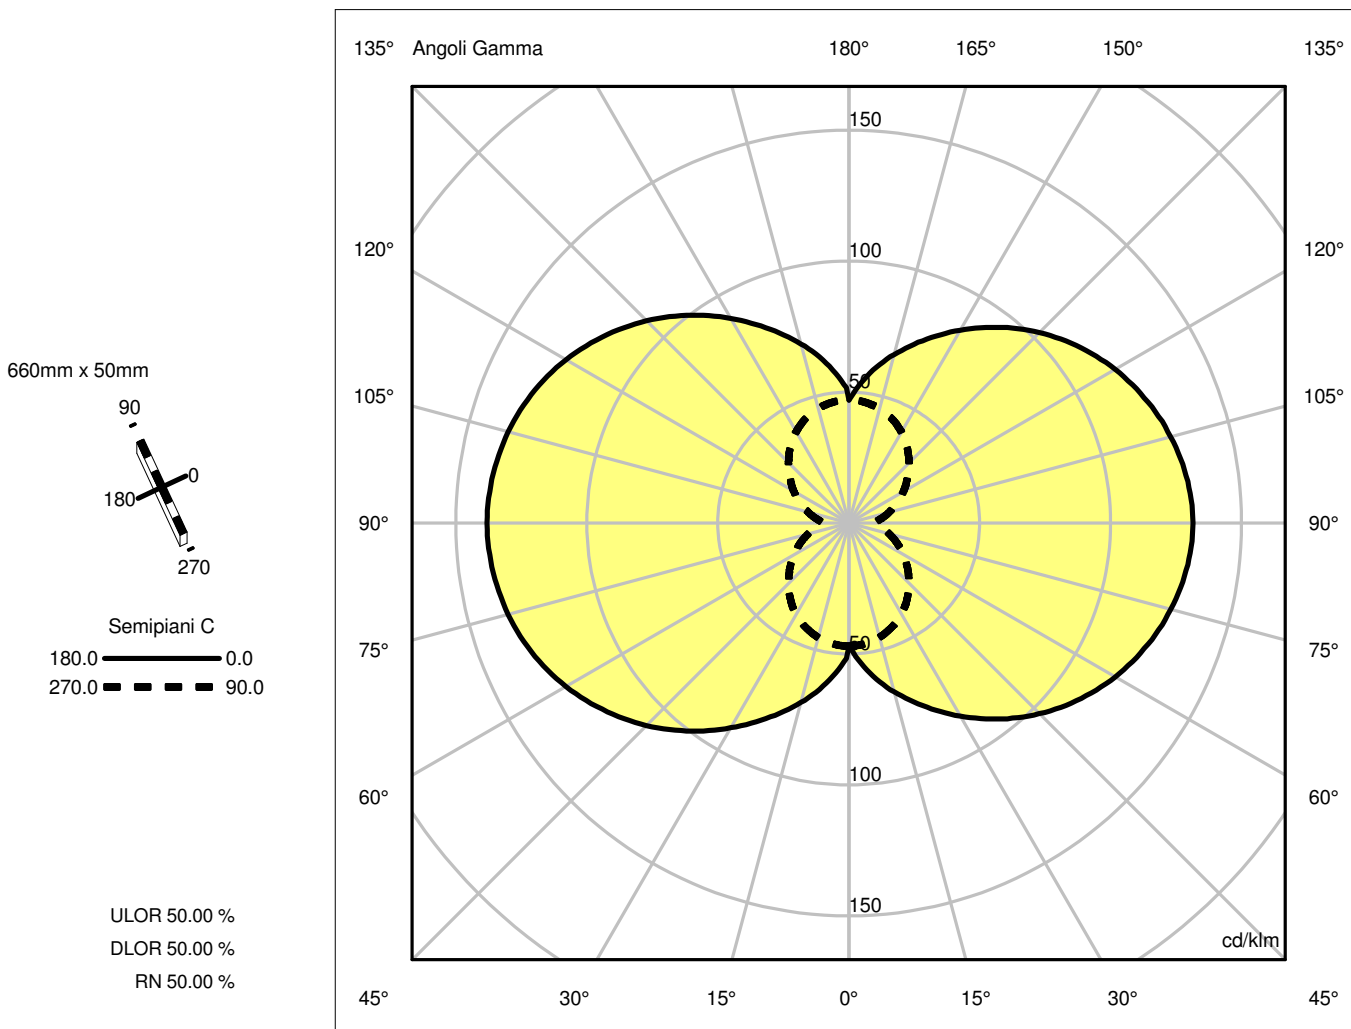

**Luminaire**

Code 1201Y00A  
Name Alphabet of light - Y

**Measur.**

Code FTS1700212  
Name Alphabet of light - Y

Luminaire Flux	1366.00 lm	Luminaire Power	21.00 W	Efficacy	65.05 lm/W	Efficiency	100.00%
Lamps Flux	1366.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.633600 m2	
Emitting area on Plane 0°		0.633600 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.622763 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1366.00 lm	
LED Flux=1976,36lm LED Power=21W Eff=69% EfcLed=94lm/W EfcLum=65lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90