


# Discovery Vertical 100 White Violet Integralis - Satinized aluminium - App Compatible

Ernesto Gismondi



IP20  Dimmbar: 

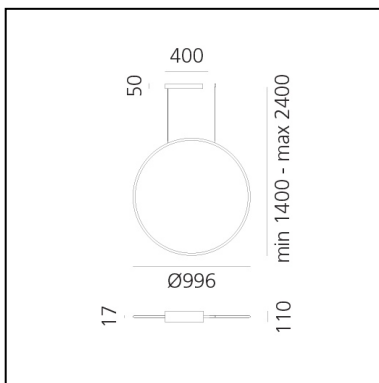

## LUMINAIRE

### DAY MODE

- Watt: **60W**
- Spannung (V): **220V - 240V**
- Lichtstrom (lm): **2646lm**
- Strahlungsstärke: **1606mW**
- CCT: **3500K**
- Efficacy: **44lm/W**
- CRI: **80**
- Dimmable Typology: **APP**

### NIGHT MODE

- Power Supply: **220V - 240V**
- Watt: **60W**

## BESCHREIBUNG

Discovery is an unobtrusive, utterly absent and immaterial element. Its volume is only perceived when switched on, thanks to the light that outlines the central emitting surface. The result is a uniform light, ideal for working environments. The company's great optoelectronic skills, combined with a thorough culture of design and with technological know-how, produces a perfectly all-purpose and surprising solution, which translates innovation into emotional perception. In the version WHITE-VIOLET INTEGRALIS, Artemide App compatible, Discovery is designed in two operating modes: Day, with white light performance for a microbial growth control, and Night, with a violet light emission for a faster reduction of the bacterial load, in particular for photosensitive pathogenic bacteria.

**ARTIKELNUMMER: 1993210IN1APP**

## FUNKTIONEN

- Artikelnummer: **1993210IN1APP**
- Farbe: **Satinized aluminium**
- Installation: **Pendelleuchte**
- Material: **Technopolymer, aluminium**
- Serie: **Design Collection**
- Anwendungsbereich: **Innenbeleuchtung**
- design: **Ernesto Gismondi**

## DIMENSION

- Breite: **cm 1.7**
- Breite: **cm 99.6**
- Länge Fuß: **cm 40**
- Max Höhe von der Decke: **cm 240**

## INKLUSIVE LICHTQUELLEN

- Kategorie: **Dual Channel LED**
- Anzahl: **1**
- CRI: **80**
- Color Tolerance: **3SDCM**
- Service Life Kanal 1: **L70 B50 60000h**
- Service Life Kanal 2: **L70 B50 20000h**

- Lichtstrom (lm): **27lm**
- Strahlungsstärke: **4866mW**
- Dimmable Typology: **APP**

**ZUBEHÖR**



Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP