


## Luminaire

Code 1201100A  
Name Alphabet of light - I


## Measur.

Code FTS1700196  
Name Alphabet of light - I

Luminaire Flux	646.00 lm	Luminaire Power	11.00 W	Efficacy	58.73 lm/W	Efficiency	100.00%
Lamps Flux	646.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	50 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	960 mm
Horizontal Luminous Area		0.002500 m2		Emitting area on Plane 180°		0.048000 m2	
Emitting area on Plane 0°		0.048000 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.047179 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		646.00 lm	
LED Flux=936,36lm LED Power=11W Eff=69% EfcLed=85lm/W EfcLum=59lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040		C11	
F UTE	0.50 J + 0.50 T			B NBN		BZ 9	



ULOR 50.00 %  
DLOR 50.00 %  
RN 50.00 %

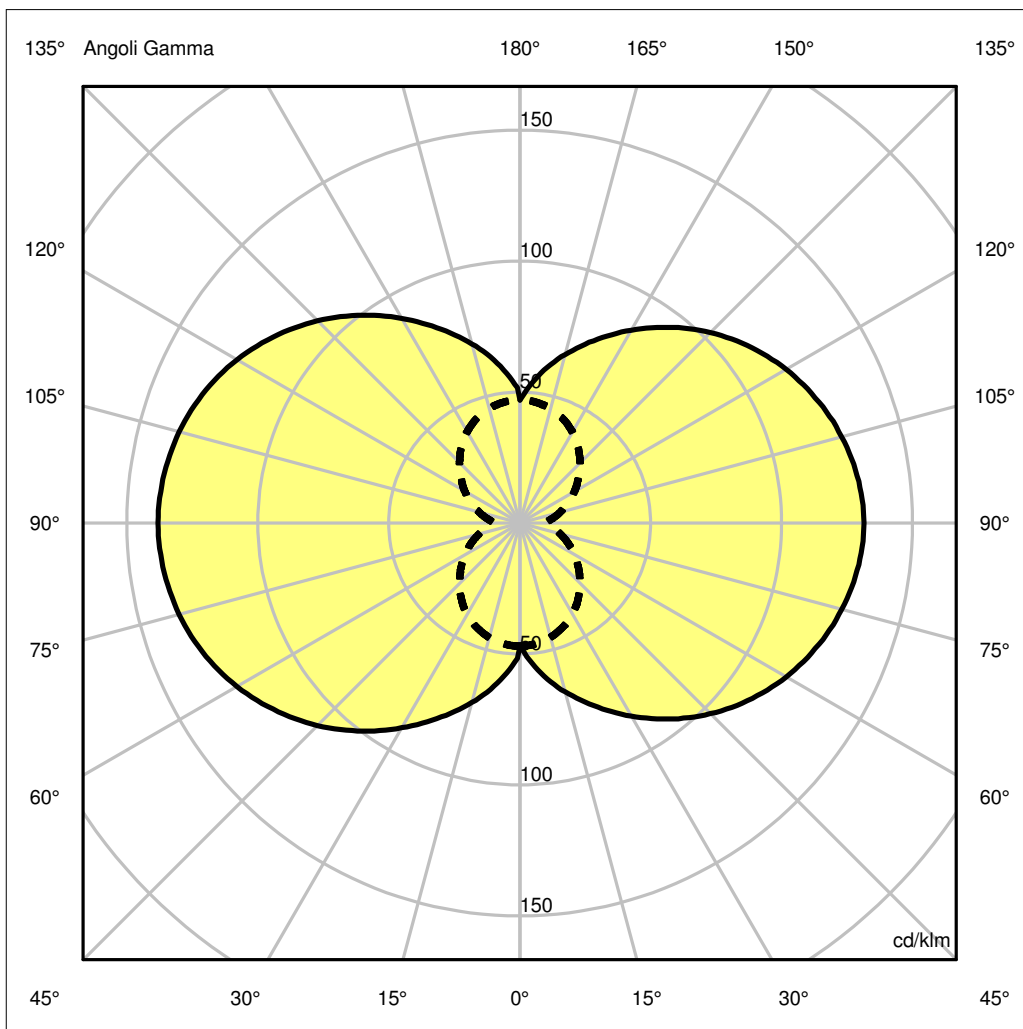

<b>Luminaire</b>							
Code	1201100A						
Name	Alphabet of light - I						
<b>Measur.</b>							
Code	FTS1700196						
Name	Alphabet of light - I						
Luminaire Flux	646.00 lm	Luminaire Power	11.00 W	Efficacy	58.73 lm/W	Efficiency	100.00%
Lamps Flux	646.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	50 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	960 mm
Horizontal Luminous Area		0.002500 m2		Emitting area on Plane 180°		0.048000 m2	
Emitting area on Plane 0°		0.048000 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.047179 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		646.00 lm	
LED Flux=936,36lm LED Power=11W Eff=69% EfcLed=85lm/W EfcLum=59lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90