Luminaire
Code KUSHI FLOOR LED
Name KUSHI FLOOR LED
Measurem.
Code 0001FT20S
Name KUSHI FLOOR LED

Luminaire Flux	458.00 lm	Luminaire Power	4.60 W	Efficacy	99.57 lm/W	Efficiency	100.00%
Sources Flux	458.00 lm	Maximum value	92.86 cd/klm	Position	C=0.00 G=174.00	CG	Rotosymmetrical

Round Luminaire	Diam. 160 mm	Height	180 mm
Round Luminous Area	Diam. 160 mm	Height	120 mm
Horizontal Luminous Area	0.020106 m2	Emitting area on Plane 180°	0.019200 m2
Emitting area on Plane 0°	0.019200 m2	Emitting area on Plane 270°	0.019200 m2
Emitting area on Plane 90°	0.019200 m2	Glare area at 76°	0.023494 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical
Date	01-05-2020	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	458.00 lm

Luminaire Sources

Line	Flux [lm]	Pow. [W]	Q.ty
Board LED SMD - 700mA - 4W - Nominal Lumen 650 lm - 2700K - CRI80	458.00	4.60	1

C.I.E.	22 47 73 45 100	D DIN 5040	C12
F UTE	0.45 J + 0.55 T	B NBN	BZ 9 / 2.5 / BZ 8 / 3 / BZ 9

Diam=160mm



C Halfplanes

180.0 0.0
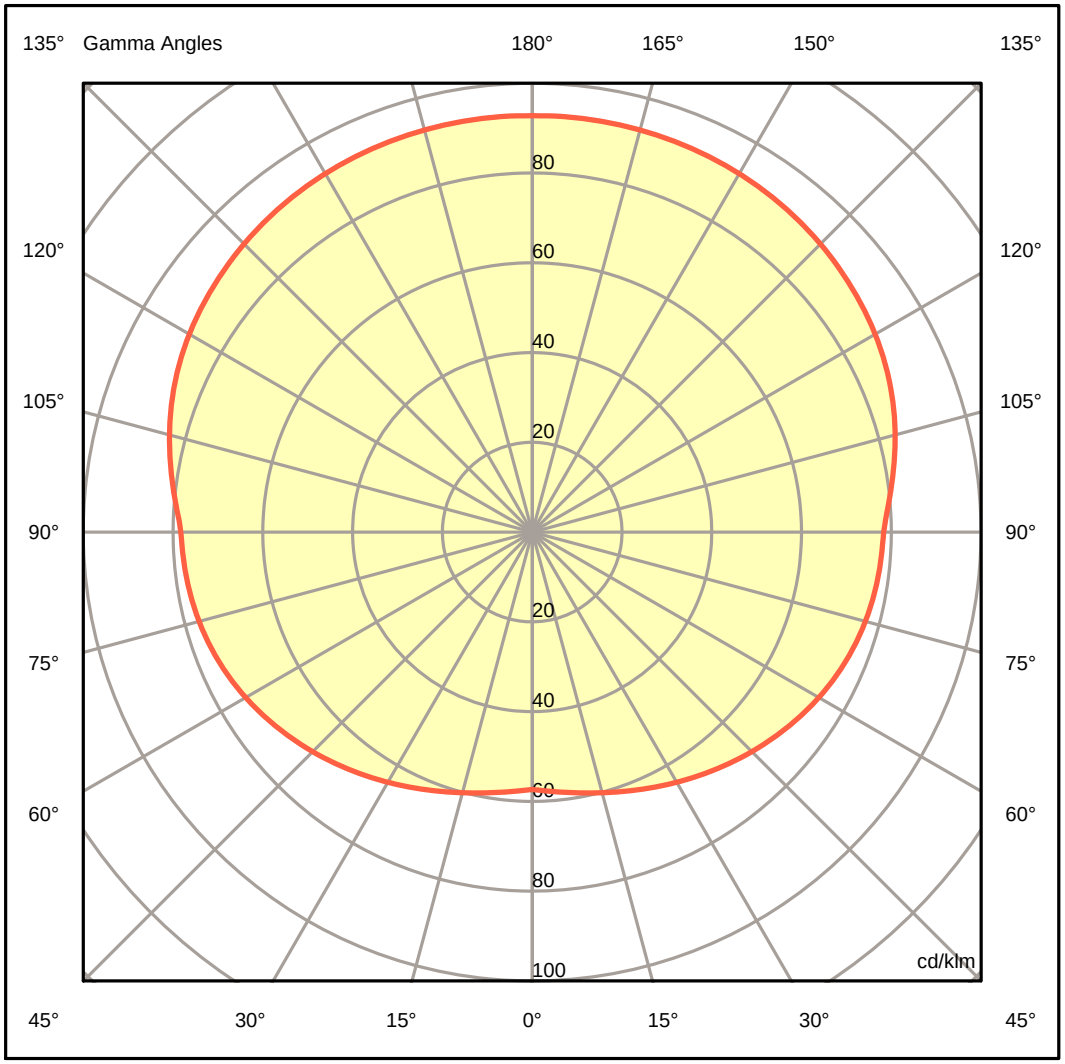
ULOR 54.77 %
DLOR 45.23 %
RN 54.77 %